

UNCLASSIFIED

AD NUMBER	
ADC029543	
CLASSIFICATION CHANGES	
TO:	unclassified
FROM:	confidential
LIMITATION CHANGES	
TO:	Approved for public release, distribution unlimited
FROM:	Distribution authorized to U.S. Gov't. agencies only; Test and Evaluation; 18 OCT 1982. Other requests shall be referred to Naval Ocean Research and Development Activity Stennis Space Center, MS.
AUTHORITY	
ONR ltr, 31 Jan 2006; ONR ltr, 31 Jan 2006	

THIS PAGE IS UNCLASSIFIED

CONFIDENTIAL


Naval Ocean Research
and Development Activity
NSTL Station, Mississippi 39529

NORDA Technical Note 63

COPY # 31



Environmental Effects on Low Frequency Transmission Loss in the Gulf of Mexico (U)

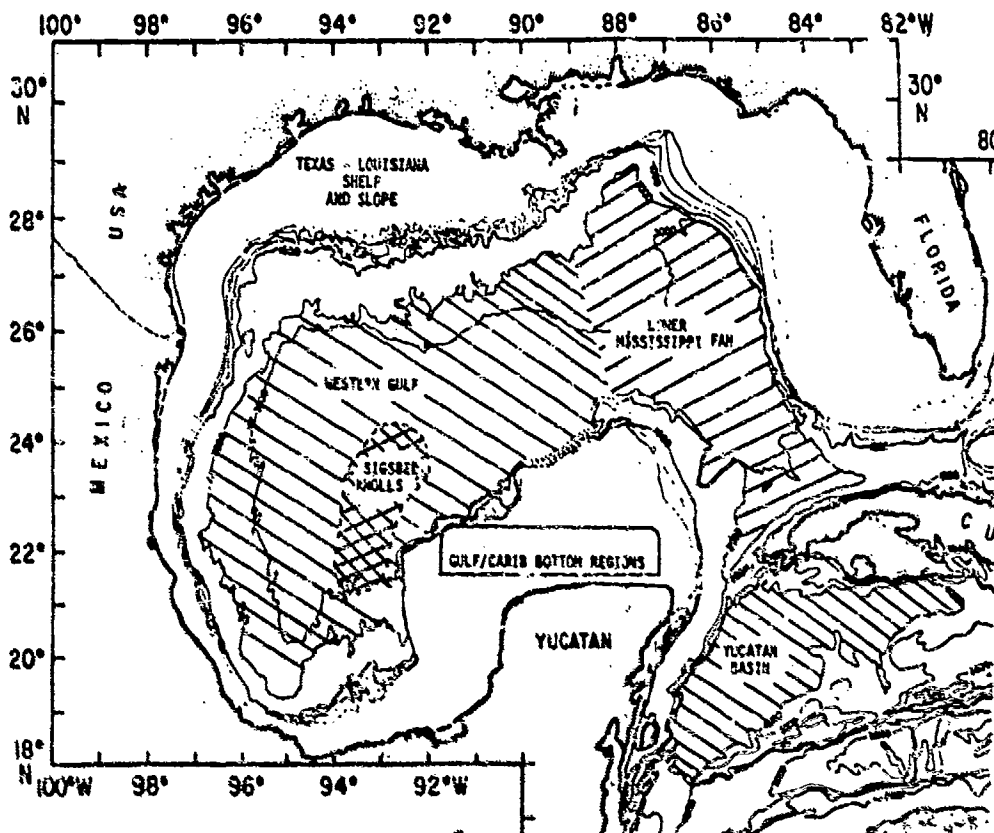

Distribution limited to U. S. Government
Agencies only. Further request for this
Document must be made to NORDA,
Code 321, NSTL Station, MS 39529

Burtie A. Brunson
M. Mark Truxillo
Richard B. Evans

OCT 18 1982

Classified by OPHAVINST 55513.5
Encl. 42, 07 Feb 1977
Review on 07 Feb 1997

Surveillance Environmental Acoustic Support Project
Ocean Science and Technology Laboratory

"NATIONAL SECURITY INFORMATION"

SEPTEMBER 1980



Authorized Disclosure Subject to Criminal
Penalties

CONFIDENTIAL

CONFIDENTIAL

ABSTRACT (U)

(U) Acoustic transmission loss data were acquired during Cruise 1 of the CHURCH STROKE III Exercise of July 1979. Initial comparisons of observed transmission loss data, with pre-exercise model predictions made using the ASTRAL model with historical environmental data inputs indicated a considerable degree of disagreement. A series of post-exercise model runs were undertaken to isolate the environmental factors contributing to the observed disagreement. Model runs using a range-dependent normal mode model (SNAP) were made using a geoaoustic description of the seafloor. Good agreement was attained for detailed structure comparisons. Estimates made using the model ASTRAL, together with a bottom loss description derived from the same geoaoustic description of the seafloor, matched the observed levels quite well in an average sense. Since the attenuation estimates were derived from those resulting from the BEARING STAKE Exercise, some implications as to the validity of geoaoustic parameter extrapolation are apparent. Additional implications arise with respect to the degree to which pre-exercise ambient noise estimates agree with observations made during CHURCH STROKE III.



CONFIDENTIAL

(This Page Intentionally Left Blank)

CONFIDENTIAL

CONTENTS (U)

	Page
List of Illustrations (U)	iv
I. Introduction (U)	1
II. Transmission Loss Comparisons (Pre-Exercise) (U)	1
III. Sound Speed and Bathymetry Comparisons (U)	4
IV. Bottom Loss Comparisons (U)	7
V. Transmission Loss Comparisons (Post-Exercise) (U)	10
A. One-Dimensional Model Comparisons (U)	10
B. Two-Dimensional Model Comparisons (U)	16
VI. Conclusions (U)	16
VII. Recommendations (U)	21
VIII. References (U)	22

CONFIDENTIAL

ILLUSTRATIONS (U)

	Page
Figure 1 (C). Location of acoustic array and transmission loss track CTP01 during CHURCH STROKE III, Cruise 1 (U)	2
Figure 2 (C). Transmission loss values for CHURCH STROKE III, Cruise 1, track CTP01 (U)	3
Figure 3 (U). Archival sound speed and bathymetry profiles along track CTP01 (U)	5
Figure 4 (U). Measured sound speed and bathymetry profiles along track CTP01 (U)	6
Figure 5 (U). Geographic assignment of bottom types by SAI (U)	8
Figure 6 (U). Geographic assignment of bottom regions by ARL (U)	9
Figure 7 (U). Bottom loss curves for SAI bottom type C (U)	11
Figure 8 (U). Bottom loss curves for SAI bottom type D (U)	11
Figure 9 (U). Bottom loss curves for SAI bottom type E (U)	11
Figure 10 (U). ARL geoacoustic bottom parameters for Lower Mississippi Fan Region (U)	12
Figure 11 (U). Comparison of SAI type C and ARL Lower Mississippi Fan region bottom loss curves for 67 Hz (U)	12
Figure 12 (C). Comparison of ASTRAL transmission loss model predictions and CHURCH STROKE III measurements (U)	13
Figure 13 (C). Comparison of 1-D SNAP transmission loss estimates and CHURCH STROKE III measurements, 40-85 nm (U)	14
Figure 14 (C). Comparison of SNAP 1-D transmission loss estimates and CHURCH STROKE III measurements, 80-125 nm (U)	15
Figure 15 (C). Comparison of transmission loss estimates using 1-D SNAP and ASTRAL models, 2-D ASTRAL model and CHURCH STROKE III measurements (U)	17
Figure 16 (C). Comparison of SNAP 2-D transmission loss estimates and CHURCH STROKE III measurements, 40-85 nm (U)	18
Figure 17 (C). Comparison of SNAP 2-D transmission loss estimates and CHURCH STROKE III measurements, 80-125 nm (U)	19
Figure 18 (C). Comparison of transmission loss estimates using 2-D SNAP and ASTRAL models and CHURCH STROKE III measurements (U)	20

CONFIDENTIAL

I. INTRODUCTION (U)

(C) During the summer of 1979 an environmental acoustic measurement exercise known as CHURCH STROKE III was conducted in the eastern Gulf of Mexico. The exercise, sponsored by the Long Range Acoustic Propagation Project, resulted in measurements of transmission loss and ambient noise directionality being obtained at a site located near a bathymetric feature known as the Catoche Tongue (23.62°N, 86.00°W; point E of Fig. 1).

(C) This particular site offered the opportunity to observe two acoustically important effects. The presence of steep slopes and shallow banks in the southeast, southwest, and northwest quadrants offered the potential for significant bathymetric blockage of ship-radiated noise produced by ships located in these sectors. It was hypothesized that the bathymetry would serve to diminish the ambient noise contributions to the side-lobes and ambiguous beams of a mid-water line array located in the Catoche Tongue, with its near-broadside beams steered into the northeast quadrant. Additionally, the presence of a steep basin-slope-shelf transition in the bathymetry at a moderate distance from the array location afforded the opportunity to obtain transmission loss data which could be used to determine the degree to which up-slope enhancement affected the received level of a low-frequency source being towed over a highly range dependent track. The data, together with the supporting environmental observations, were to serve in a test of the ability of numerical models to correctly estimate ambient noise directionality in a complex environment, as well as their ability to handle up-slope enhancement effects on transmission loss.


(U) An extensive modeling effort was undertaken prior to the exercise. Predictions were made of transmission loss, directional noise, and omnidirectional noise for several combinations of source depth, receiver depth, and frequency. The study was centered around the Catoche Tongue site. The track of greatest interest, from a transmission loss point of view, was to the northeast along a bearing of 052° from the array location in the Catoche Tongue. This track has been designated CTP01. The array location and this principal transmission loss track are depicted in Figure 1.

(U) Post-exercise comparisons between model predictions and measurements indicated that the pre-exercise data inputs to the models were probably inaccurate representations of the actual environment. The most probable environmentally related causes of observed discrepancies between model results and measurement results were thought to be the bottom loss estimates and the historical shipping distribution. In order to determine the degree to which the archival environmental data differed from those environmental data observed during the exercise, and to assess the resultant impact on transmission loss (TL) model results, the post-exercise analysis effort described in this report was undertaken. No attempt has been made to reconcile observed shipping with historical shipping distributions.

II. TRANSMISSION LOSS COMPARISONS (PRE-EXERCISE) (U)

(U) The plots of Figure 2 allow comparisons to be made between the measured TL values and the TL estimates derived from archival sound speed profiles, bathymetry, and bottom loss estimates extrapolated from the sparse bottom loss data available in the region. A range dependent transmission loss model (ASTRAL) was exercised to obtain the 30-40 nm range-averaged estimates shown in the plots. While one should not expect detailed agreement for this type of comparison, it


CONFIDENTIAL

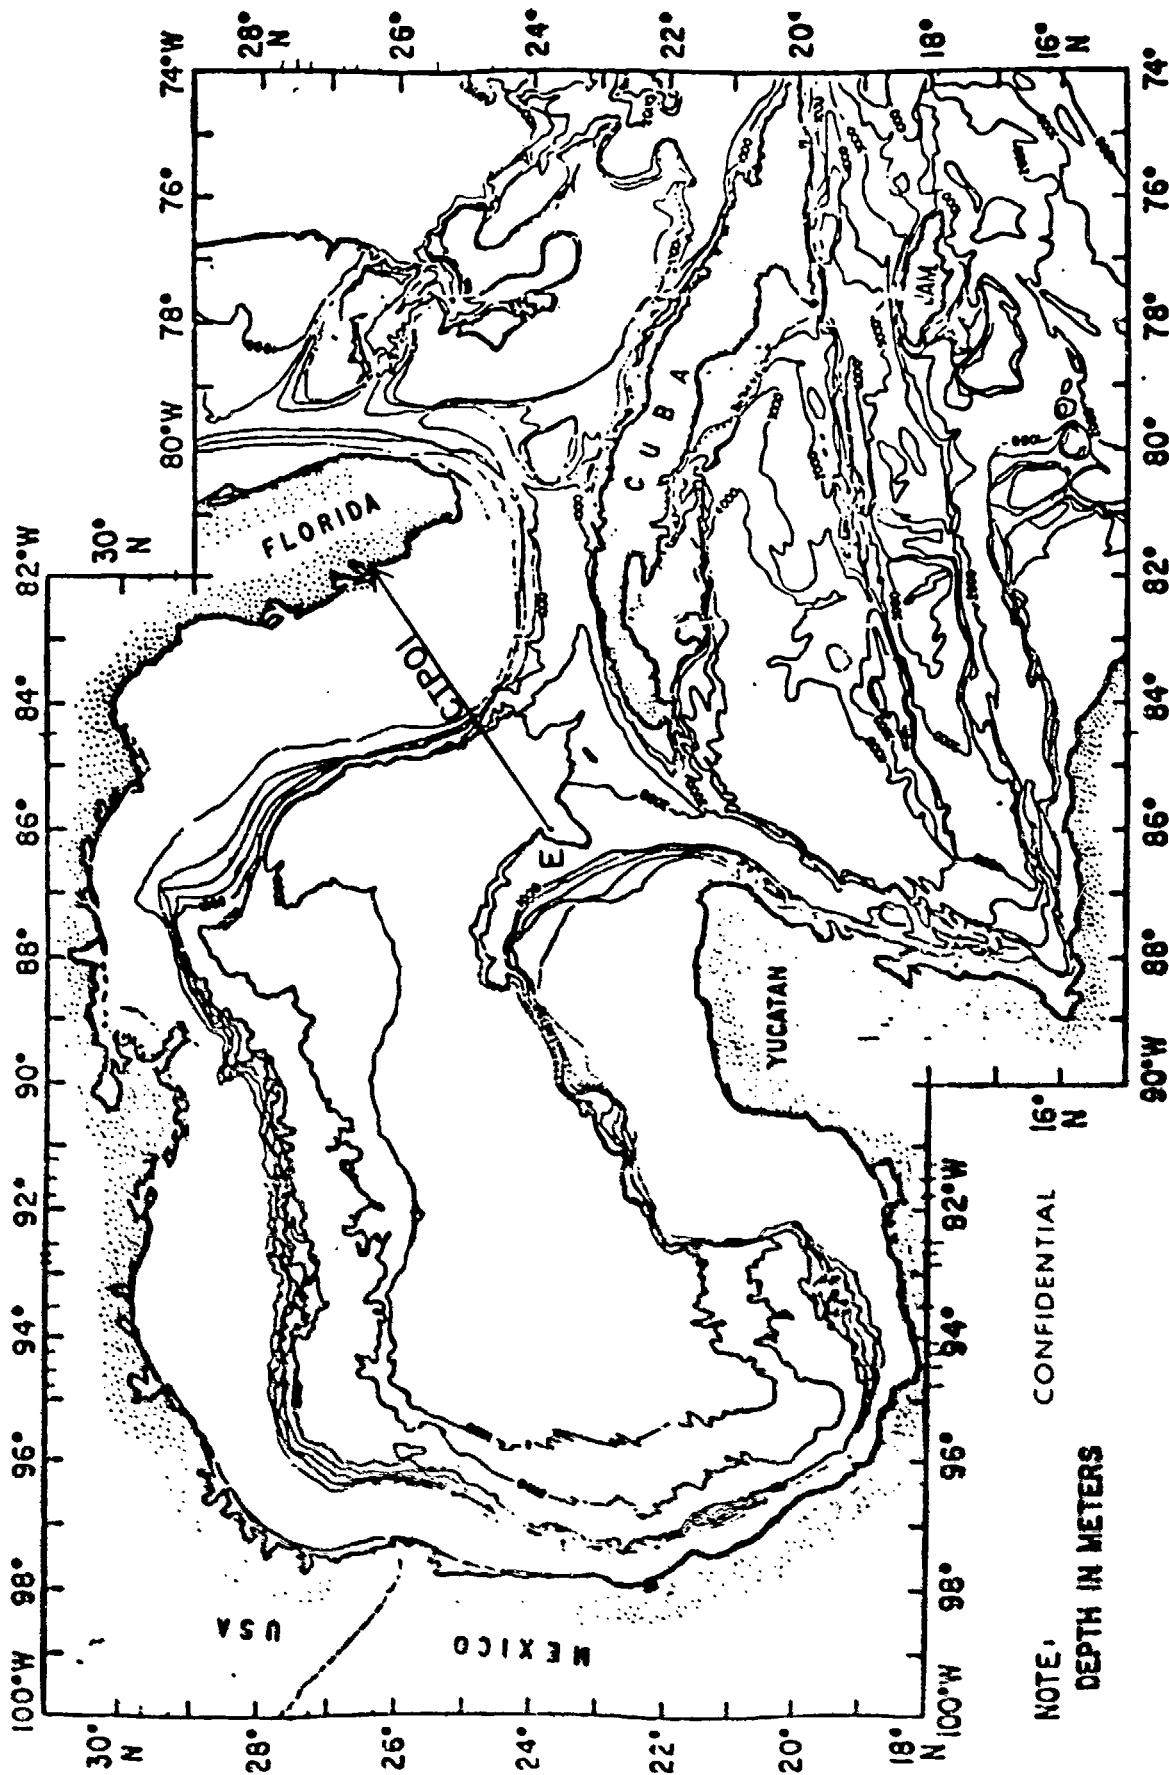


(U) Figure 1. Location of acoustic array and transmission loss track CTP01 during CHURCH STROKE III, cruise 1

CONFIDENTIAL

CONFIDENTIAL

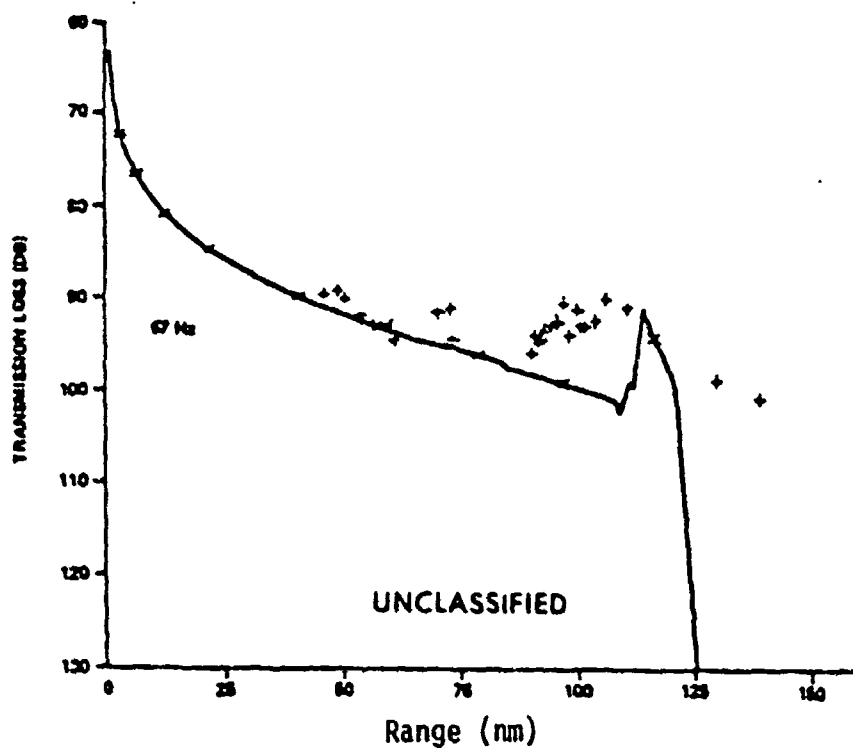

TRANSMISSION LOSS VALUES FOR
CHURCH STROKE III CRUISE 1

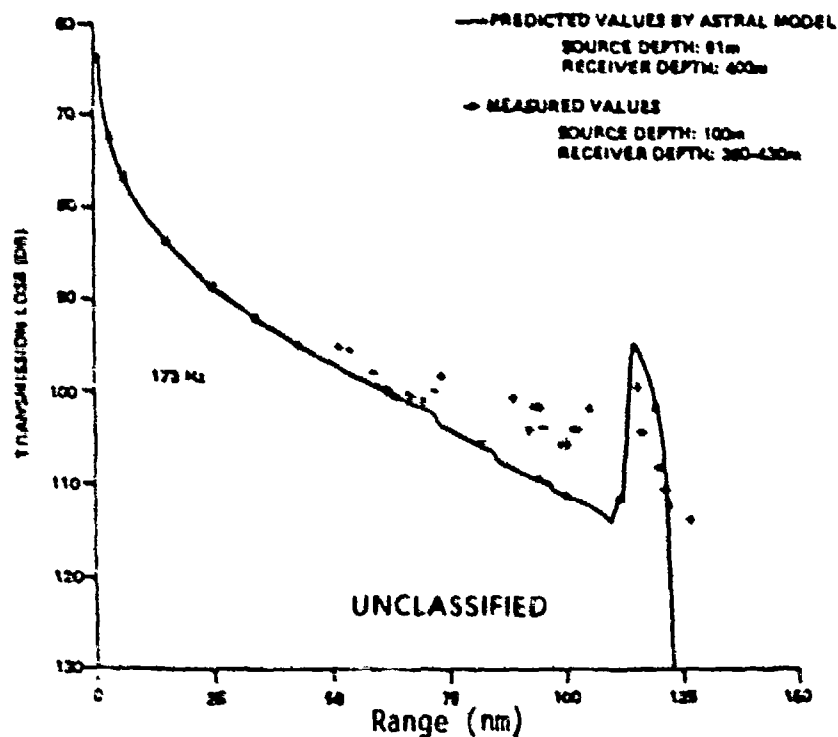

(U) Figure 2. Transmission loss values for CHURCH STROKE III, cruise 1, track CTP01 (from Tracor, 1979)

CONFIDENTIAL

CONFIDENTIAL

appears that the model has overestimated the average TL and may have failed to accurately predict the onset of bathymetric enhancement.


(U) The degree of disagreement is sufficient to indicate that significant inaccuracies may exist in the environmental input data. Since the track is bottom limited, the bottom loss is an important parameter. An inaccurate representation of the loss due to bottom interaction could account for a substantial portion of the differences between observations and model estimates. Other environmental factors which could account for some of the TL differences include inaccurate representation of the effect of the Gulf of Mexico Loop Current on the sound speed field, and improper location of the basin-slope transition region in the archival bathymetry. These potential effects have been tested with regard to their impact on the estimated TL by comparison with actual environmental data in the cases of the sound speed and bathymetry, and by the use of various bottom loss descriptions derived from geophysical observations in the investigation of bottom interaction effects.

III. SOUND SPEED AND BATHYMETRY COMPARISONS (U)

(U) The archival environmental data used in the pre-exercise model runs are depicted in Figure 3. The bathymetry is essentially flat out to 110 nm and has an average depth of 3394 m. The slope begins at 110 nm and extends to 125 nm where the water depth is 350 m. The shelf extends from the 125 nm point, reaching land at 280 nm. One may observe a representation of the measured bathymetry along CTP01 in Figure 4. The basin floor is seen to be essentially flat with the exception of a small rise at 17 nm. Along the source track, the average depth in the basin is 3298 m, about 100 m less than the archival data indicate. The actual bathymetry indicates a basin-slope break at 111 nm, with the slope extending to 127 nm and reaching a depth of 386 m. These values are very similar to the archival bathymetry values. A visual comparison of the bathymetry depicted in Figures 3 and 4 reveals a difference in the fine detail, with the actual bathymetry showing a few features which do not appear in the archival data. The agreement between the two representations appears to be sufficient to preclude any major impact on the transmission loss estimates, particularly at low frequency.

(C) If one were looking for the effects of the Gulf Loop Current in the sound speed profiles, one would look for a subsurface sound speed maximum between 100 m and 200 m in depth. This manifestation of the salinity maximum is generally found at this depth in waters associated with the Gulf Loop Current (Nowlin and Hubertz, 1972). The archival SVPs displayed in Figure 3 show only a hint of a maximum. The only effect observed is a decreased gradient between 30 m and 200 m in the first profile. In contrast the first three profiles of Figure 4 indicate the presence of a sound speed maximum at 150 m - 160 m forming a weak channel centered about 110 m - 130 m. The fourth and fifth profiles show a weakened effect manifested as a decreased sound speed gradient between 70 m and 120 m. The sixth profile shows little indication of a salinity maximum in the 100 m to 200 m depth range. Another apparent difference between the archival and observed SVP field is the presence of a layer in the archival data. The layer depth increases from 30 m in the first profile to 75 m in the second profile located 72 nm away. The towed source was located at an average depth of 91 m; thus, it is possible that the subsurface maximum could affect the propagation since the source could be located in the resultant upper sound channel. However, it is not felt that the presence or absence of a shallow surface layer is a significant factor in the propagation.

CONFIDENTIAL-

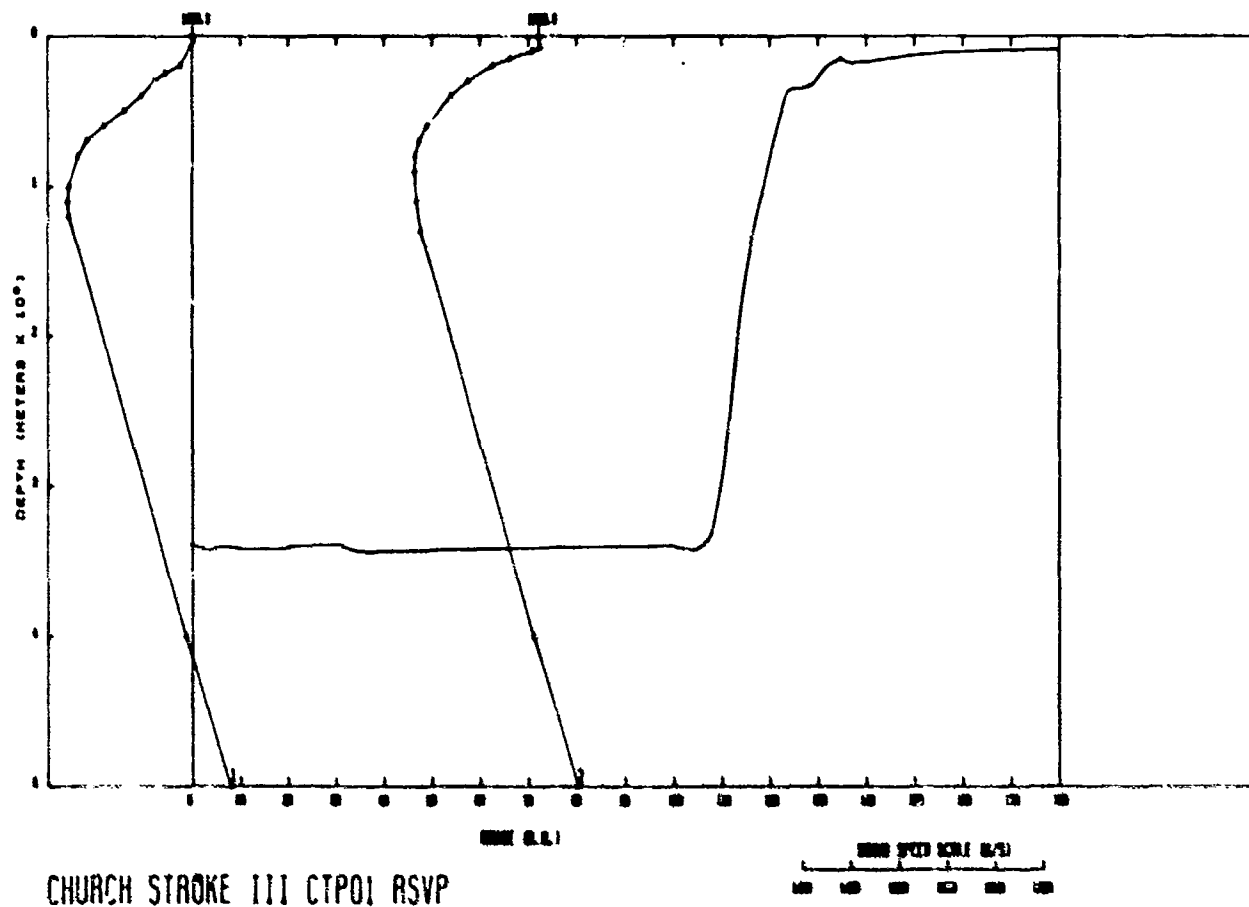


UNCLASSIFIED

(U) Figure 3. Archival sound speed and bathymetry profiles along track CTP01

CONFIDENTIAL

CONFIDENTIAL

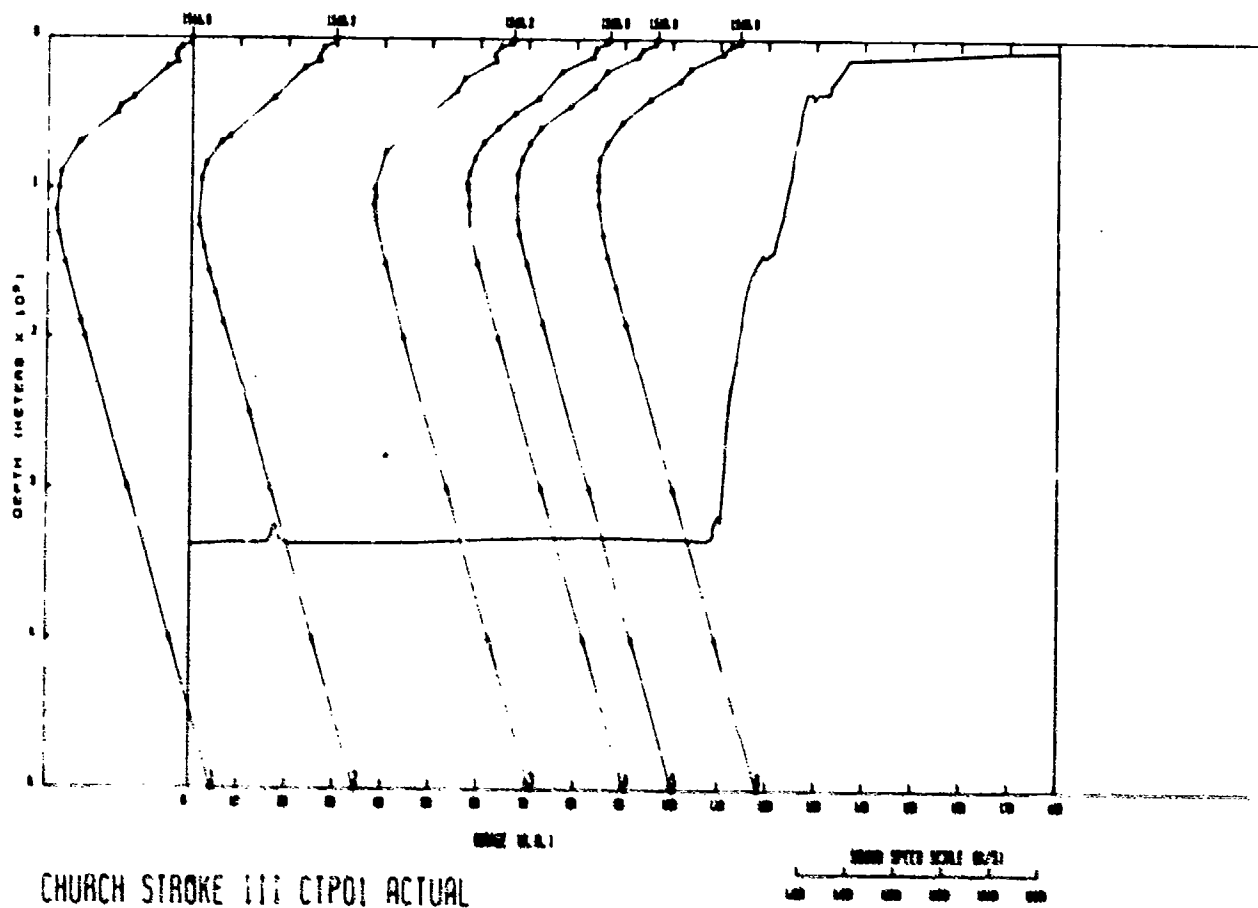

UNCLASSIFIED

(U) Figure 4. Measured sound speed and bathymetry profiles along track CTP01

CONFIDENTIAL

CONFIDENTIAL


(U) A feature common to both the archival and actual SVP field is the gradual shoaling of the deep sound channel axis from about 1150 m at the beginning of the track to about 950 m at the basin-slope break.

(C) Since the actual SVP field and bathymetry were similar to their archival representations, little effort has been expended to isolate their effects. The only observable effect in the model estimates which may be related to SVP differences is a slight decrease (1-5 dB) in average TL between 67 nm and 87 nm, possibly due to the disappearance of the 150 m subsurface maximum in the actual SVP field at 67 nm. This may be an artifact, since there is little indication in the TL data of such a decrease in TL in this region of the track. Other than this region, the model results from ASTRAL using a single archival profile and a flat bottom (referred to as the 1-D case) compare very well with the ASTRAL results using the full measured environment, as displayed in Figure 4 (referred to as the 2-D case) out to the basin-slope bathymetry break. This effect indicates that the differences in basin bathymetry and SVPs are minimal for average TL calculations. More detailed calculations using a normal mode model (SNAP), which is capable of utilizing range dependent environmental inputs, indicate that SVP differences affect the detailed structure, but have little effect upon the average TL levels. This conclusion is borne out by comparisons made between 1-D SNAP results, 2-D SNAP results and TL observations along the basin portion of the source track.

IV. BOTTOM LOSS COMPARISONS (U)

(C) As a result of the environmental comparisons discussed in the previous sections, the major portion of the effort to isolate significant environmental factors was concentrated on the bottom loss description. It was known before the exercise that an adequate bottom description was not available. In an attempt to improve the state of understanding of the bottom loss in the exercise area, a pair of independent studies were undertaken. The first study, conducted by Science Applications, Inc. (SAI), concentrated on assessing the availability and quality of measurements of bottom loss in the Gulf of Mexico. Only two sites (indicated by asterisks in Fig. 5) were found to be suitable sources of directly measured bottom loss data. One was located near the Catoche Tongue and the other was located south of Cuba. Clearly this data was considered insufficient to characterize the bottom-loss characteristics of the Gulf. Using geological and geophysical data derived from Naval Air Development Center bottom-loss stations, an attempt was made to supplement the sparse measurements with bottom loss estimates derived from geoaoustic models of the seafloor. Based on these analyses, the bottom-loss in the deep areas of the Gulf of Mexico and Caribbean Sea were characterized by three sets of curves, and additional sets were defined for the slope and shelf regions. Figure 5 indicates the geographic distribution of the five bottom types (A through E). These bottom types were used in the pre-exercise modeling efforts. A second study, conducted by the Applied Research Laboratory (ARL), University of Texas, concentrated on the basin regions of the Gulf/Caribbean area. This study was wholly based upon geological and geophysical data available from surveys in the Gulf/Caribbean area. Geoaoustic descriptions of the seafloor were constructed for each of four regions as displayed in Figure 6. These geoaoustic descriptions, consisting of sound speed profiles, density, and attenuation profiles, could be used directly by certain TL models, including SNAP. Their use by certain other TL models, such as ASTRAL, required the production of bottom-loss curves prior to application. Both types of bottom description were provided.


(U) The choice of the SAI description for pre-exercise modeling was based upon the availability of bottom-loss curves for slope and shelf regions, in addition to

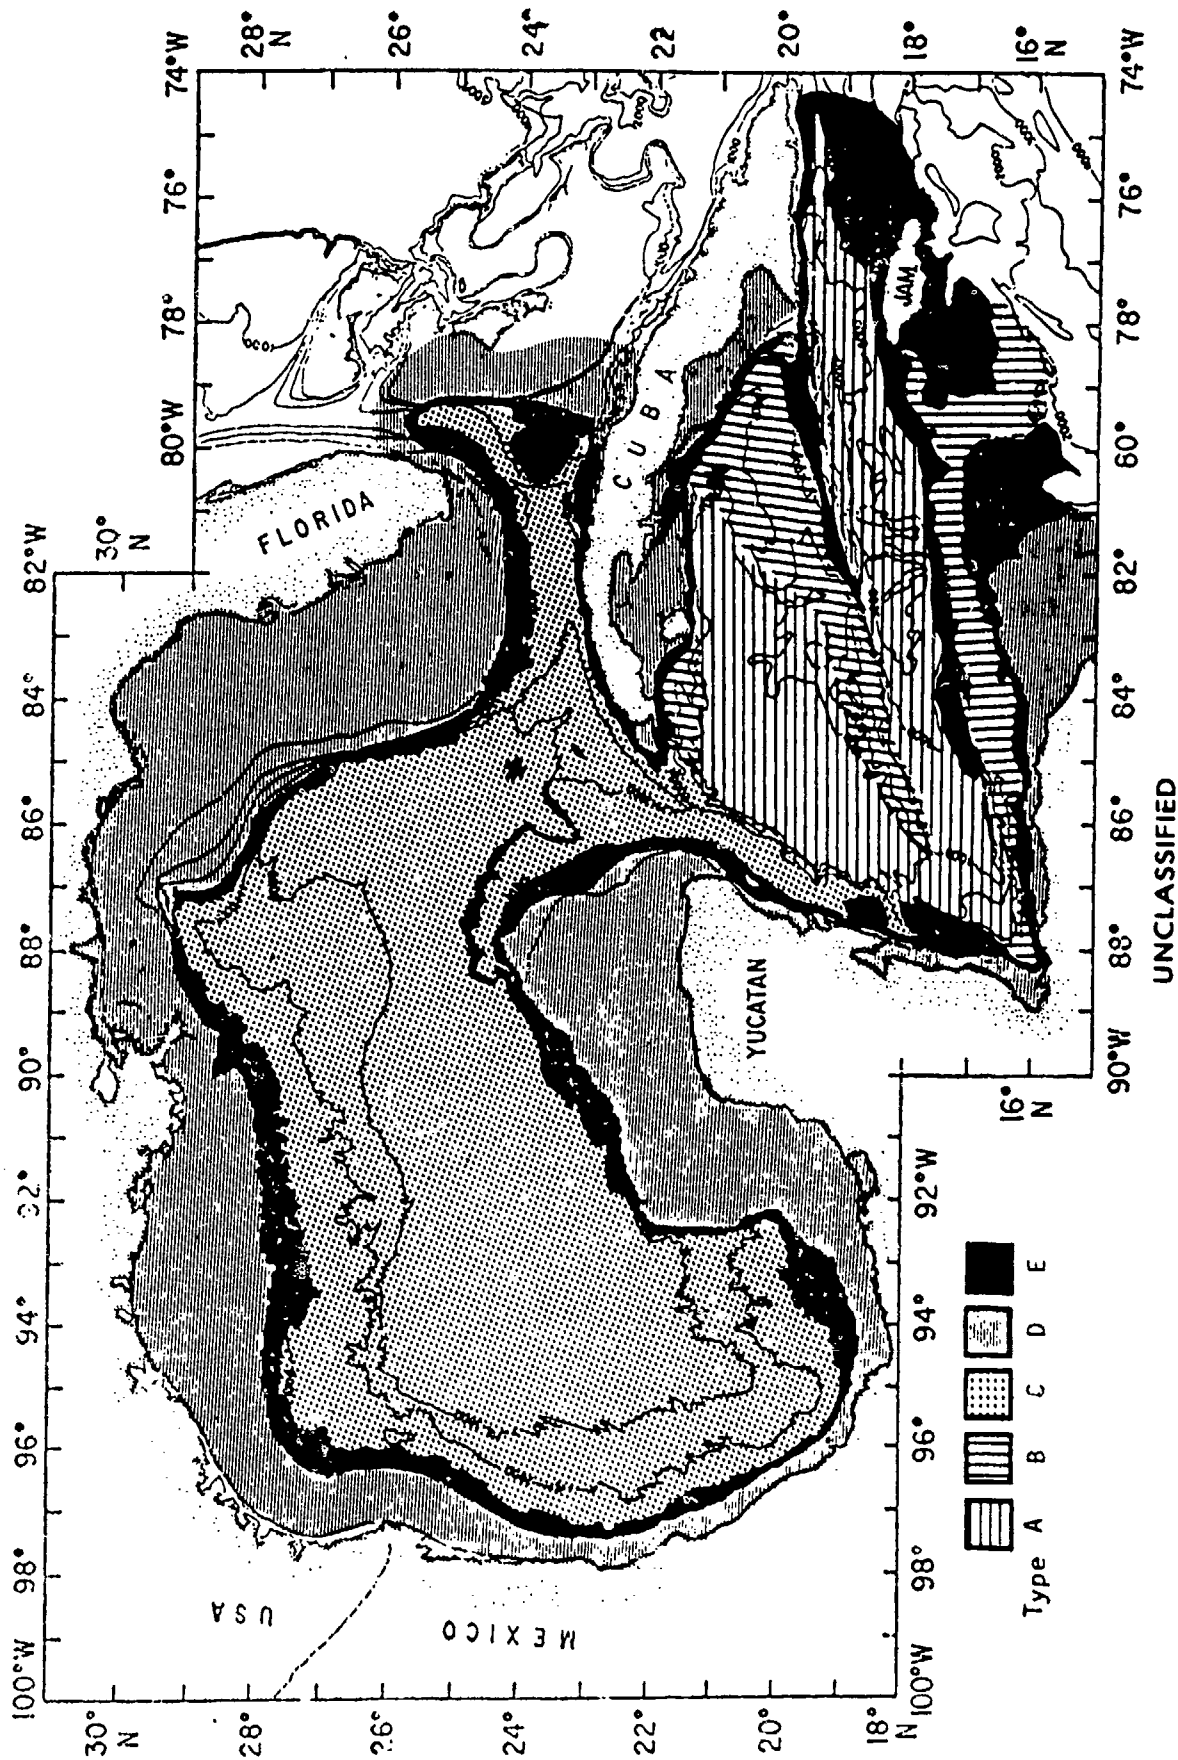

(U) Figure 5. Geographic assignment of bottom types by SAI
(from Underwater Systems, 1979)

UNCLASSIFIED

CONFIDENTIAL

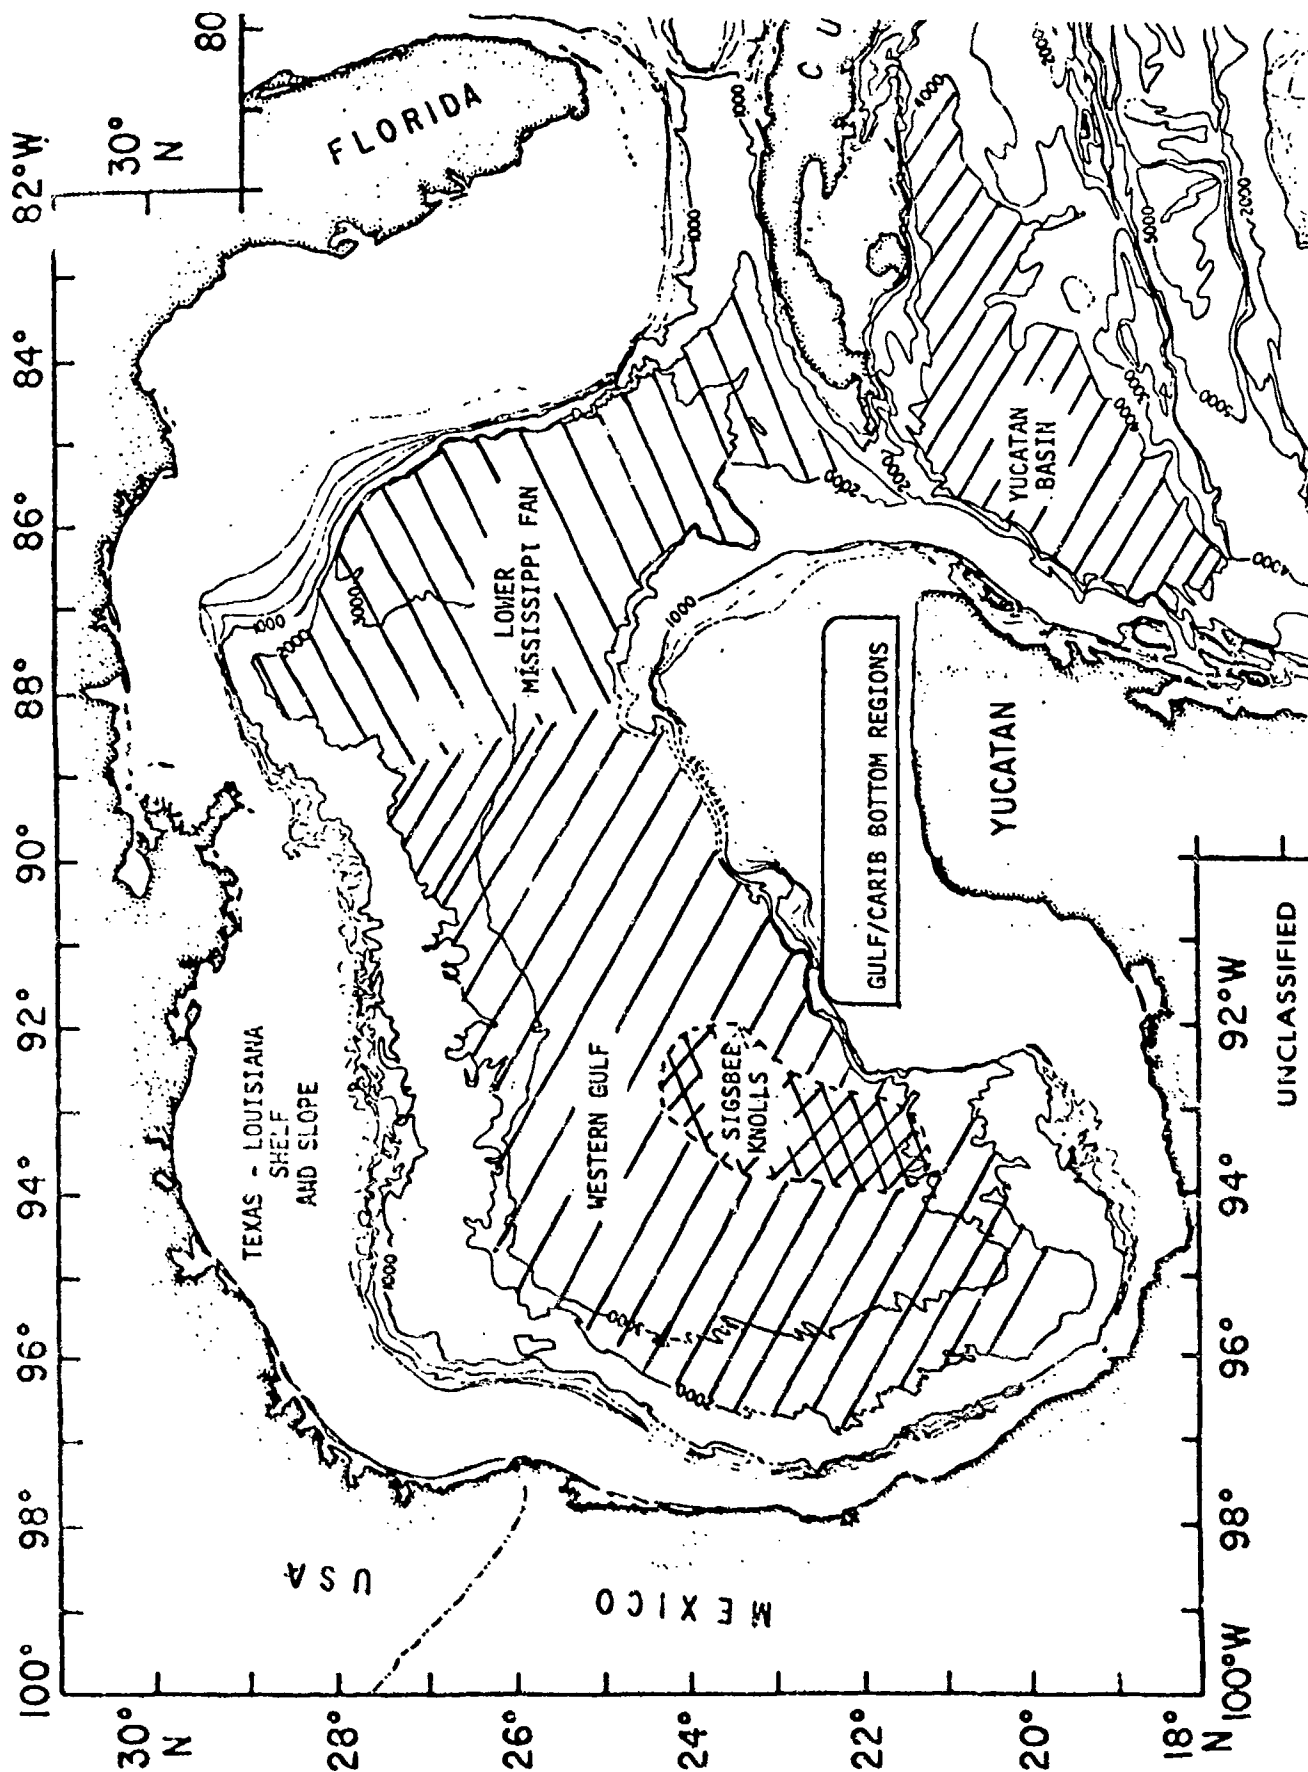

(U) Figure 6. Geographic assignment of bottom regions by ARL
(from Underwater Systems, 1979)

UNCLASSIFIED

CONFIDENTIAL

CONFIDENTIAL

the basin descriptions. This element was essential, particularly in the production of TL inputs to ambient noise models, since large numbers of noise sources are located in these shelf and slope regions.

(U) Of primary interest to this study are those bottom types which would be encountered along the source track CTP01. The SAI descriptions show the basin segment to be a type C, the slope segment to be a type E, and the shelf segment to be a type D. The ARL description, having no slope or shelf descriptions, indicates that the track falls within the Lower Mississippi Fan (LMF) region. Figures 7, 8, and 9 show the SAI bottom-loss curves, while Figure 10 is a graphical representation of the ARL geoacoustic model for the LMF region. The figure includes two possible acoustic attenuation profiles. They are labeled as L (low loss) and M (medium loss). These profiles were derived from data taken during the BEARING STAKE exercise in an area of similar geological structure (Mitchell et al., 1978).

V. TRANSMISSION LOSS COMPARISONS (POST-EXERCISE) (U)

A. One-Dimensional Model Comparisons (U)


(U) The initial test of bottom loss effects on TL were conducted using ASTRAL with the 1-D environment and bottom loss curves derived from both the low and medium loss ARL geoacoustic models. The resultant curves were graphically compared with pre-exercise ASTRAL runs made with 2-D archival environmental inputs using the SAI bottom, and TL data collected during the exercise. The bottom-loss curves used in the basin segment of CTP01 are shown as Figure 11. The principal differences are to be found in the low angle (20°) loss. Both ARL curves are significantly lower. The medium loss ARL curve reaches the level of the SAI curve at 40° , while the low loss curve remains below 4 dB per bounce out to 55° . This low curve most nearly approximates the actual basin bottom conditions, as may be observed from the TL comparison plots of Figure 12. One may observe the gradual divergence of the ASTRAL curves as bottom interactions accumulate. The low angle differences between the ARL and SAI curves lead to a difference between 2.5 and 6.0 dB at a range of 100 nm. The effect of this difference on the ambient noise predictions could be significant for nearby noise sources. Any comparisons beyond 110 nm are invalid due to the presence of the basin-slope break at that range.

(U) Further evidence that the ARL low loss geoacoustic model is the most representative is apparent from Figures 13 and 14, which show comparisons of TL predictions and data over two 40 nm range intervals of CTP 01. One may see the degree of agreement between the TL data and 1-D SNAP model predictions. The absence of any range dependence in the SVPs and bathymetry indicates that a proper representation of the bottom is sufficient to resolve most of the discrepancies between the observed TL and the pre-exercise model estimates. The agreement observable in Figure 13 indicates that the presence of the Loop Current over this range interval, as indicated by the actual SVP field of Figure 4, may not have much effect on the TL for the source depth, receiver depth, and frequency configuration of this exercise. The average level is matched quite well, and one may say that the structure is reasonably well-reproduced. The agreement in structure may be fortuitous and any final conclusions on this matter are better left to more detailed analysis. The comparison plots of Figure 14 continue to show good agreement between the 1-D SNAP estimates and the observed TL data. The two diverge beyond 110 nm, but that is to be expected in light of the onset of the slope at this range.

(U) The curves and data plotted in Figure 15 allow one to make a direct visual comparison between the 1-D model estimates of ASTRAL and SNAP using the ARL low loss bottom, the pre-exercise 2-D model estimates using archival environmental data and the SAI range dependent bottom description, and the observed TL data. The


CONFIDENTIAL

(U) Figure 7. Bottom loss curves for SAI bottom type C (from Underwater Systems, 1979)

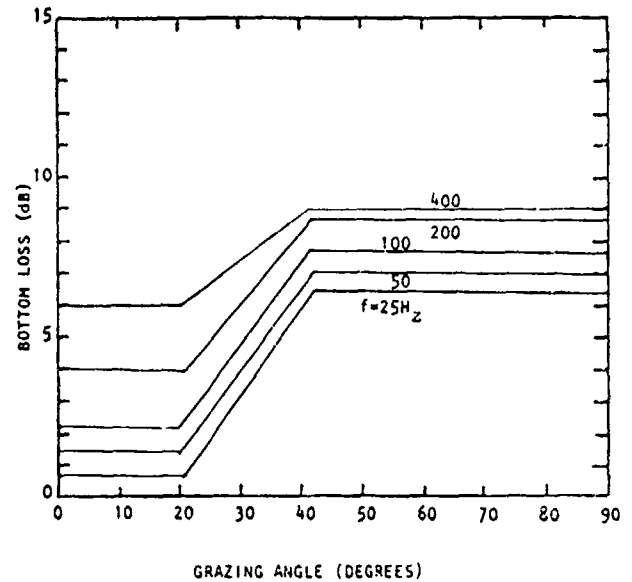


UNCLASSIFIED

(U) Figure 8. Bottom loss curves for SAI bottom type D (from Underwater Systems, 1979)

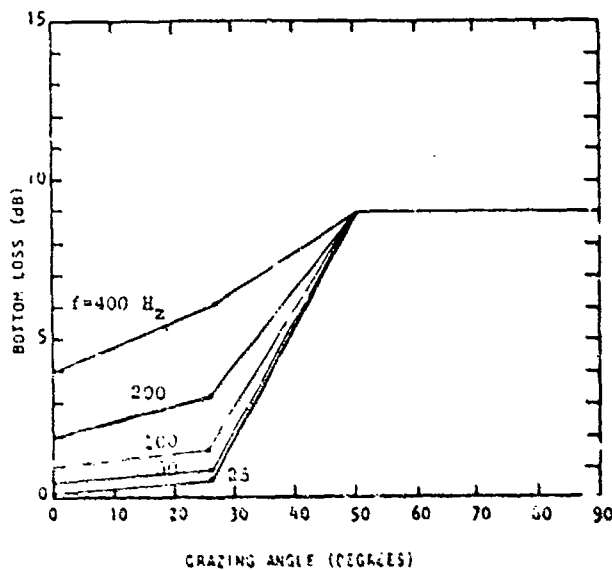

UNCLASSIFIED


(U) Figure 9. Bottom loss curves for SAI bottom type E (from Underwater Systems, 1979)

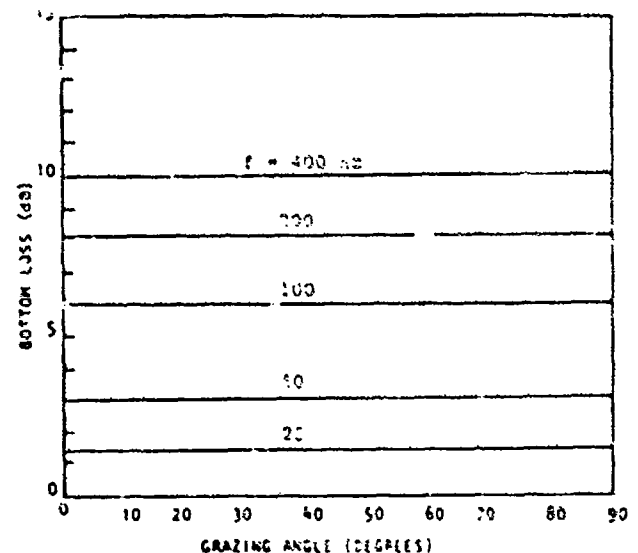


UNCLASSIFIED

CONFIDENTIAL

CONFIDENTIAL

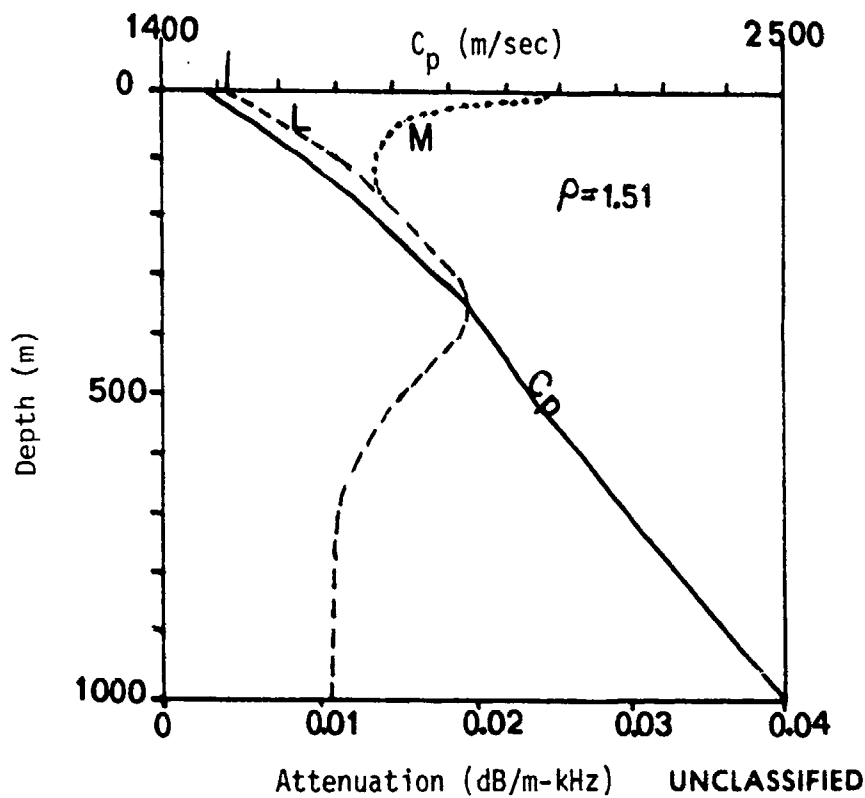


(U) Figure 10. ARL geoacoustic bottom parameters for Lower Mississippi Fan Region (from Underwater Systems, 1979)

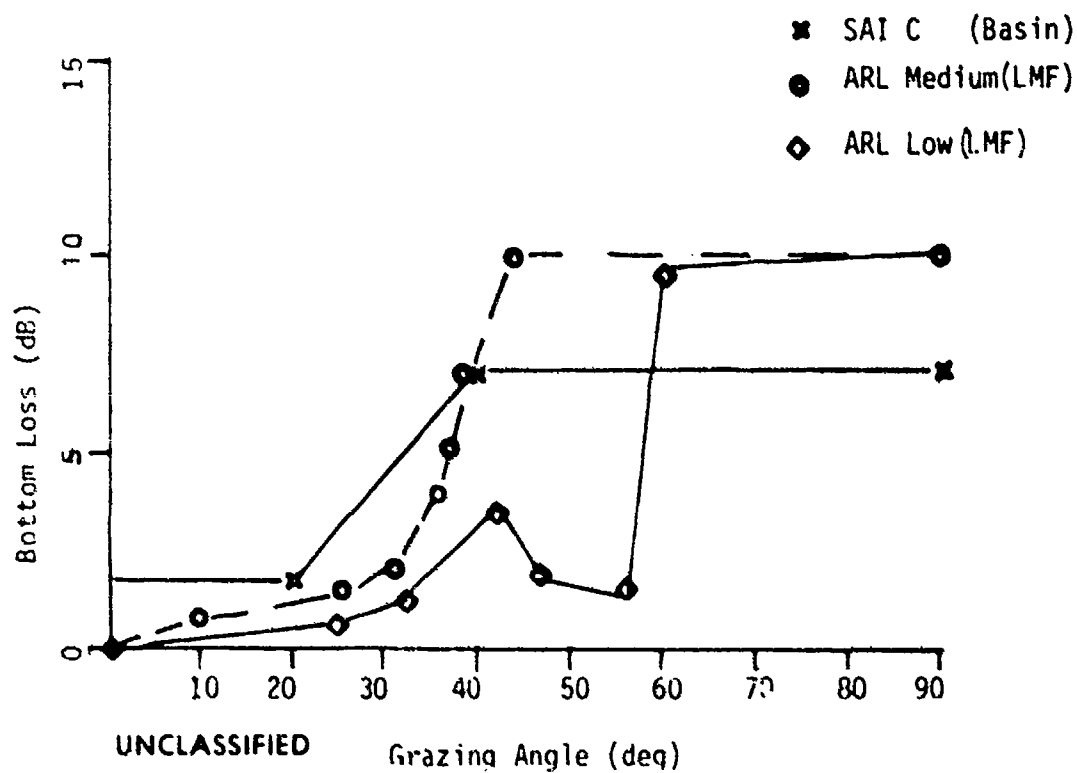

(U) Figure 11. Comparison of SAI type C and ARL Lower Mississippi Fan Region bottom loss curves for 67 Hz

CONFIDENTIAL

CONFIDENTIAL

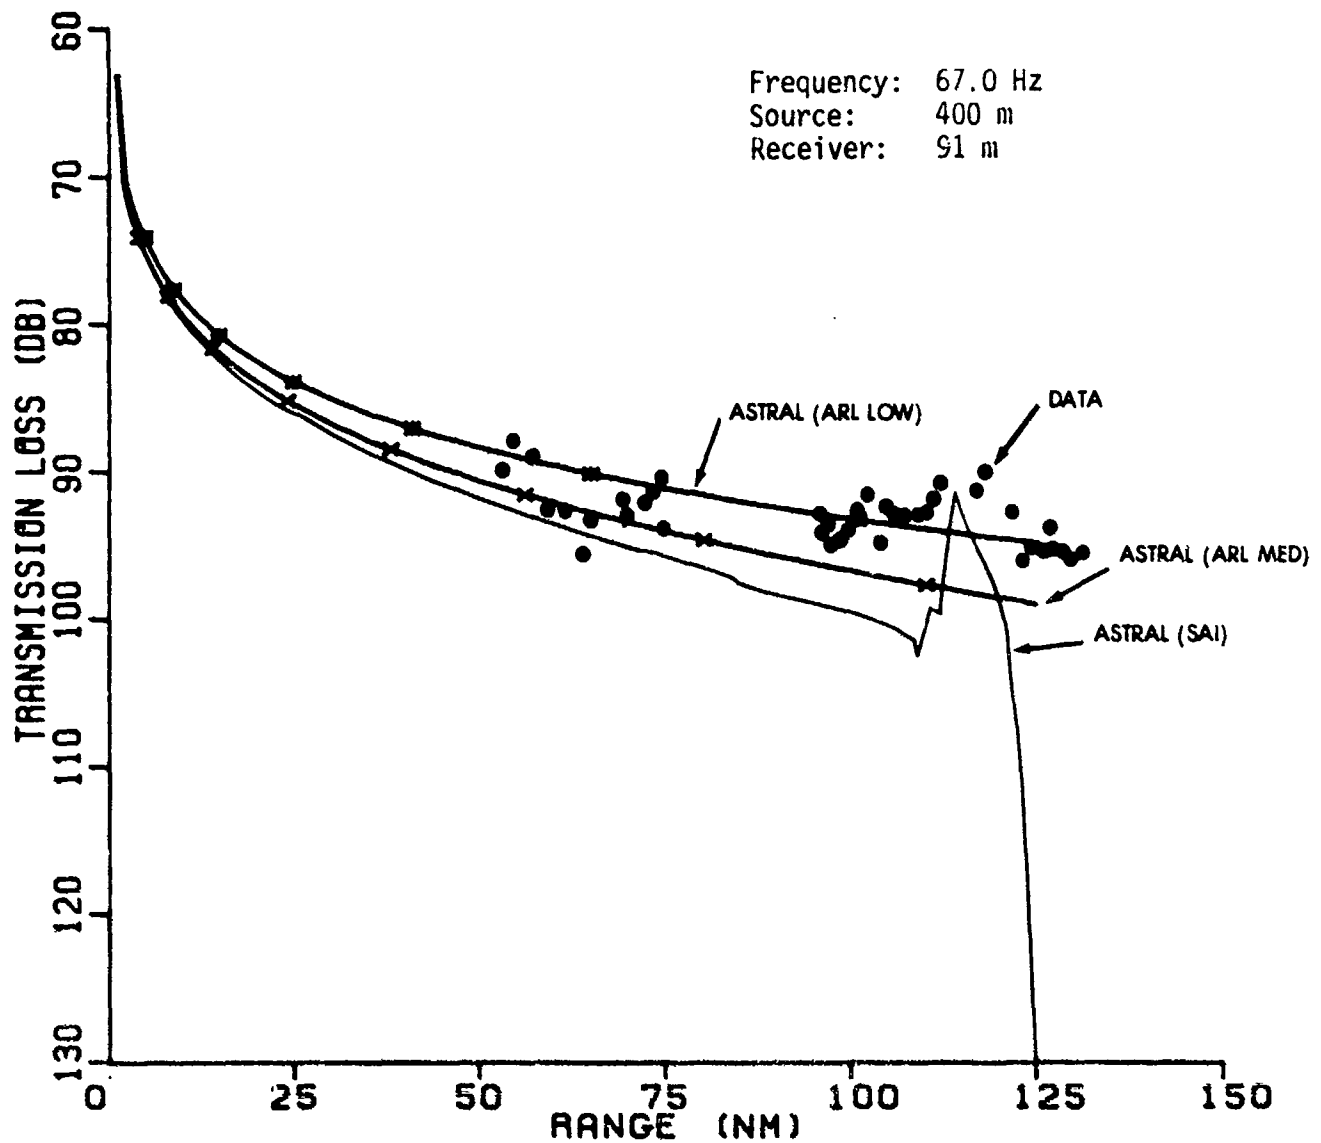


CONFIDENTIAL

(U) Figure 12. Comparison of ASTRAL transmission loss model predictions using SAI bottom types C, D, E; ARL LMF region low and medium attenuation; and CHURCH STROKE III measurements

CONFIDENTIAL

CONFIDENTIAL

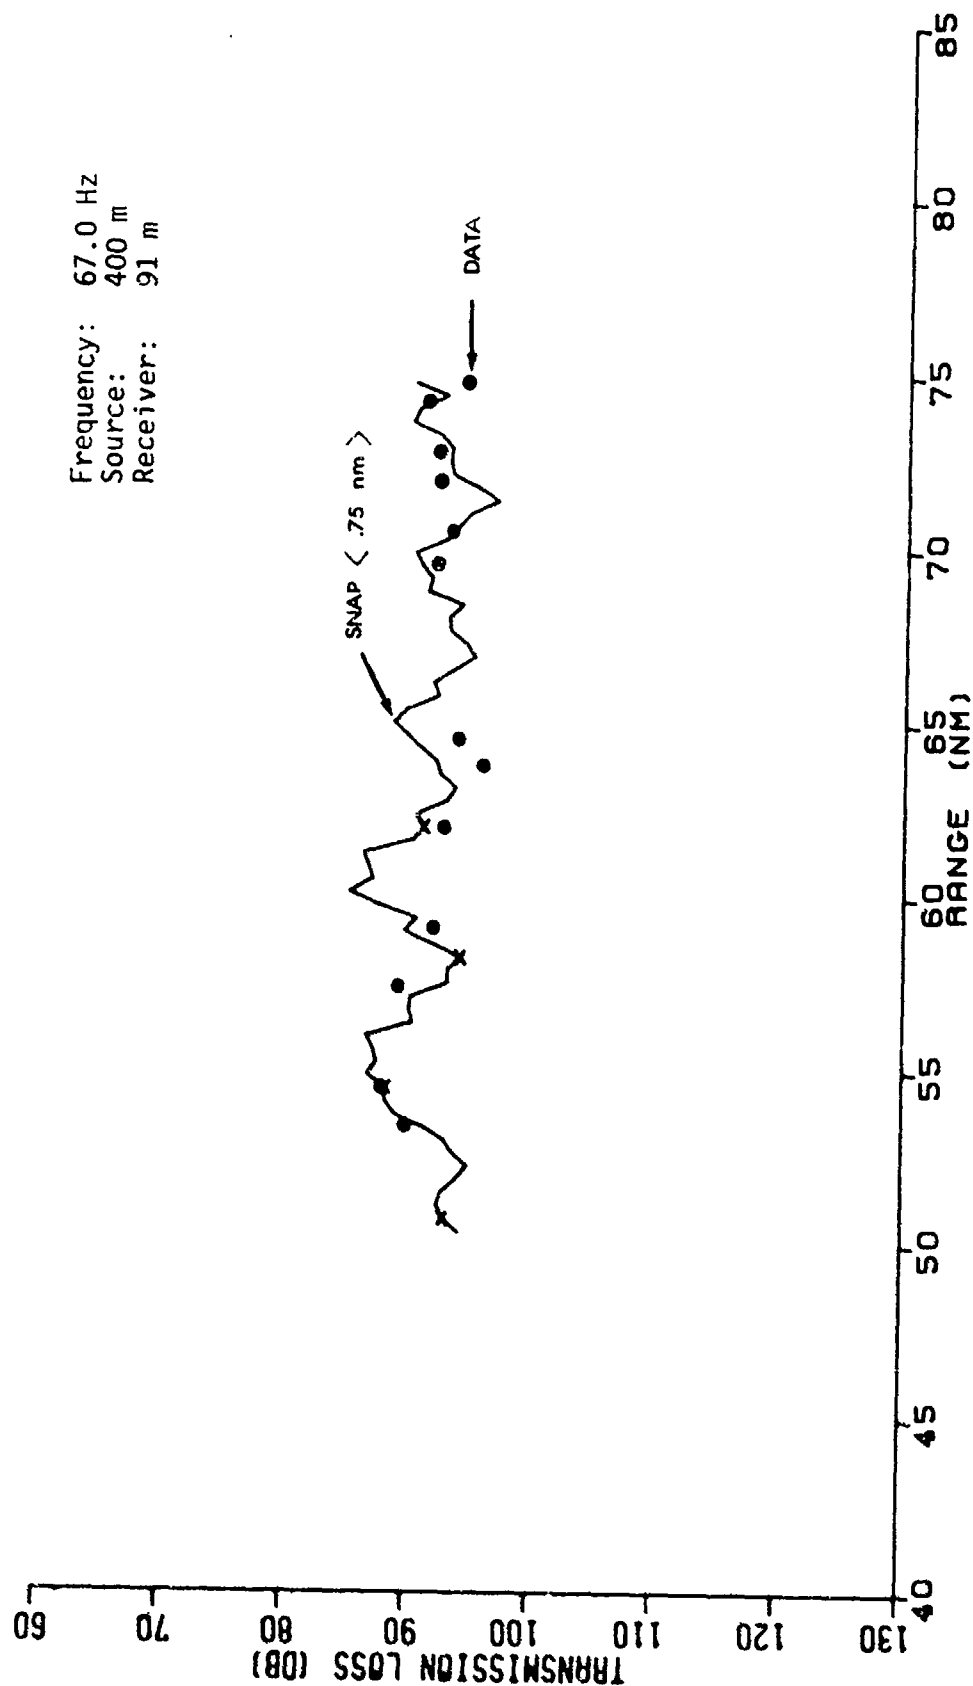


CONFIDENTIAL

(U) Figure 13. Comparison of 1-D SNAP transmission loss estimates using ARL LMF region low attenuation bottom and CHURCH STROKE III measurements, 40-85 nm

CONFIDENTIAL

CONFIDENTIAL

Frequency: 67.0 Hz
Source: 400 m
Receiver: 91 m

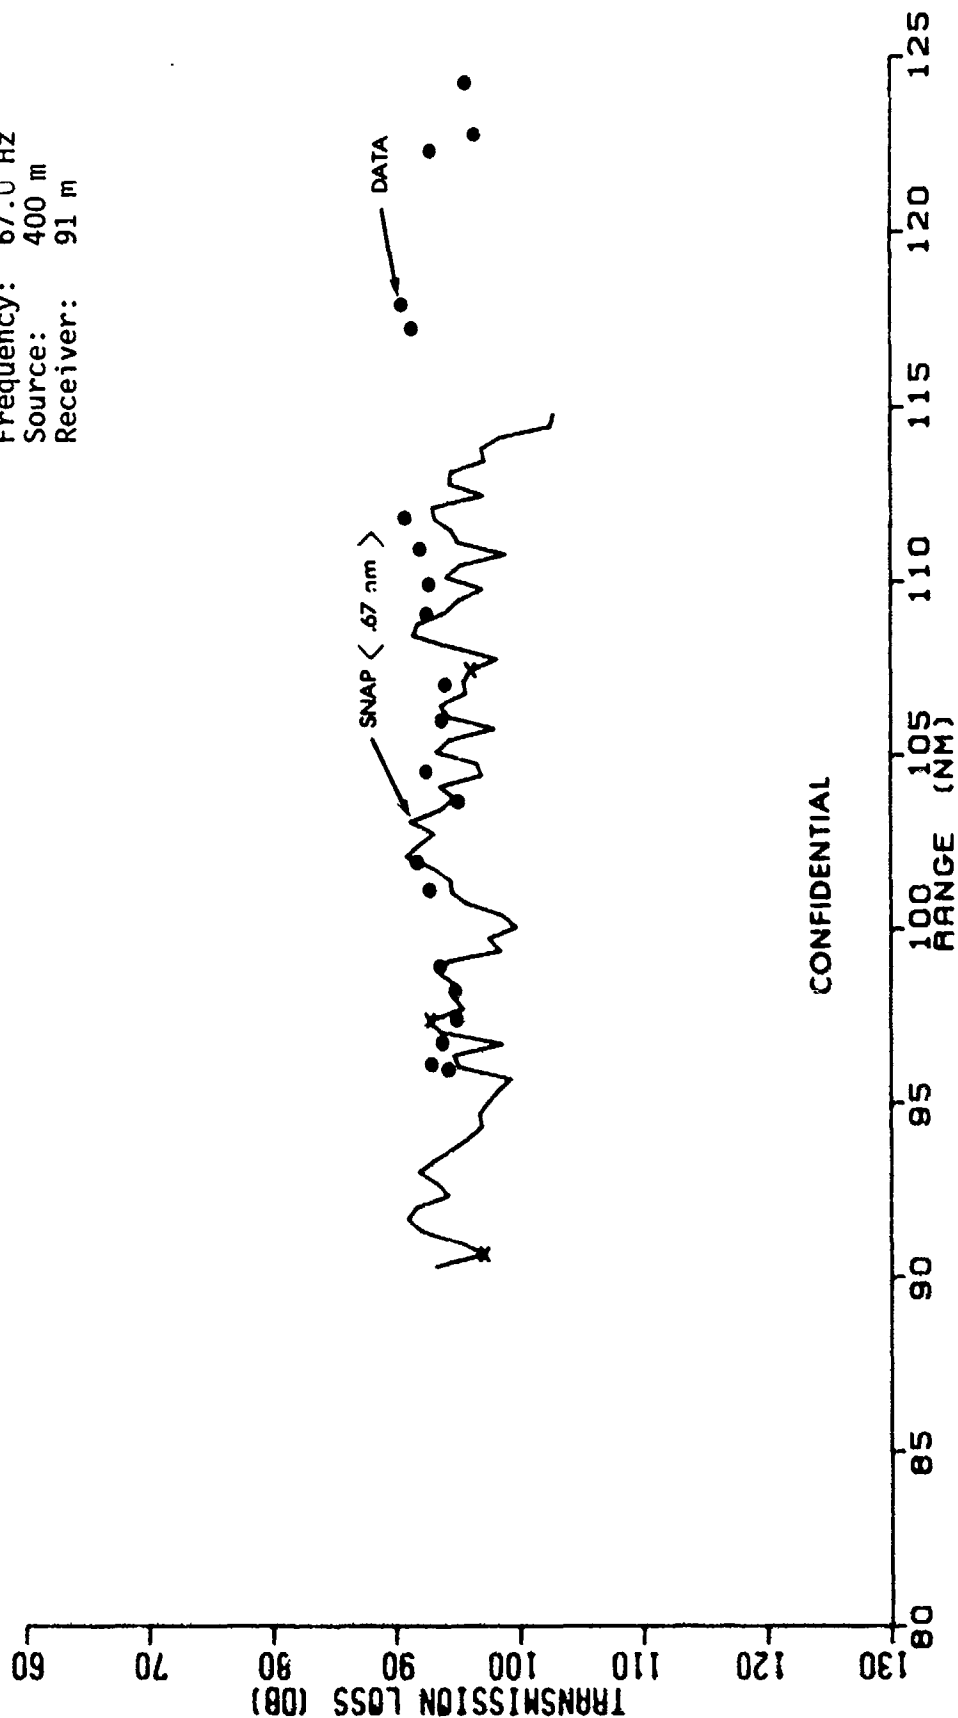

(U) Figure 14. Comparison of SNAP 1-D transmission loss estimates using ARL LMF region low attenuation bottom and CHURCH STROKE III measurements, 80-125 nm

CONFIDENTIAL

CONFIDENTIAL

data and the SAI range dependent bottom description, and the observed TL data. The good agreement among the 1-D ASTRAL, 1-D SNAP, and observed TL data is apparent as long as the 1-D assumption is valid. Yet to be resolved is the apparent discrepancy between the data and model results beyond 110 nm.

B. Two-Dimensional Model Comparisons (U)

(U) Once it was determined, through 1-D model comparisons, that the ARL low loss bottom description was adequate to resolve the apparent discrepancies between the pre-exercise model estimates and observed data for the basin, several model runs were made using all available environmental data, including SVPs and bathymetry along the source track. These actual environmental data were combined with the ARL low loss bottom description to provide the inputs for ASTRAL and SNAP.


(U) Due to input difficulties when handling rapidly varying environments such as steep slopes, SNAP was exercised only in the basin. The range dependent SVP string, along with the ARL geoacoustic bottom description, was input to SNAP in an attempt to assess the impact of the Gulf Loop Current on the TL estimates. Figures 16 and 17 show comparison plots of the 2-D SNAP estimates and the observed TL data. As with the 1-D SNAP results, the agreement is good. The detailed fluctuations do not show exceptional agreement, especially between 105 nm and 110 nm on Figure 17. The cause of this increase in TL in the model estimates cannot be related to any particular feature in the environment.

(U) Figure 18 is a composite comparison plot of the 2-D SNAP, 2-D ASTRAL, and observed TL data. The inter-model comparison shows good agreement between the SNAP and ASTRAL estimates for the basin segment (0-110 nm). An interesting feature is the small increase in the ASTRAL TL at 108 nm. This may be similar to the TL increase exhibited by SNAP at 107 nm, but is diminished and offset by the ASTRAL interval averaging. ASTRAL appears to pick up the onset of slope enhancement quite well and reproduces the rate and degree of the TL decrease as the source encounters the slope. The rapidly increasing TL beyond 127 nm is not consistent with the TL data. However, other 2-D model runs, including the Parabolic Equation model, exhibit the same rapid increase at the same range; thus, the disagreement does not appear to be unique to the ASTRAL model. Examination of the TL data reveals that the values beyond 127 nm were obtained under low signal-to-noise conditions, leading to a degree of suspicion regarding their validity.

VI. CONCLUSIONS (U)

(U) The objective of this limited examination of apparent disagreements between pre-exercise TL model estimates and observed transmission loss data was to determine the degree to which the archival environmental data differed from those environmental data observed during the measurement exercise and to assess the resultant impact on the TL model estimates. That objective has been met. The archival bathymetry has been shown to be little different from the bathymetry measured along the source track. While the historical SVP field does not indicate the strong presence of the Gulf Loop Current in contrast to the measured SVP field, the effects of this environmental difference have been shown to be somewhat insignificant for the source depth, receiver depth, and frequency configuration used in the measurements. The key factor has been shown to be the bottom description. While no direct measurements of bottom-loss were made, geoacoustic models of the seafloor were available for use in resolving discrepancies between model estimates of TL and experimental observations. Sensitivity studies conducted during this study led to the selection of a particular geoacoustic model consisting of a sound speed profile for the sediment, a sediment density, and an estimate of attenuation based upon previous experimental observations in a region with a similar geological


CONFIDENTIAL

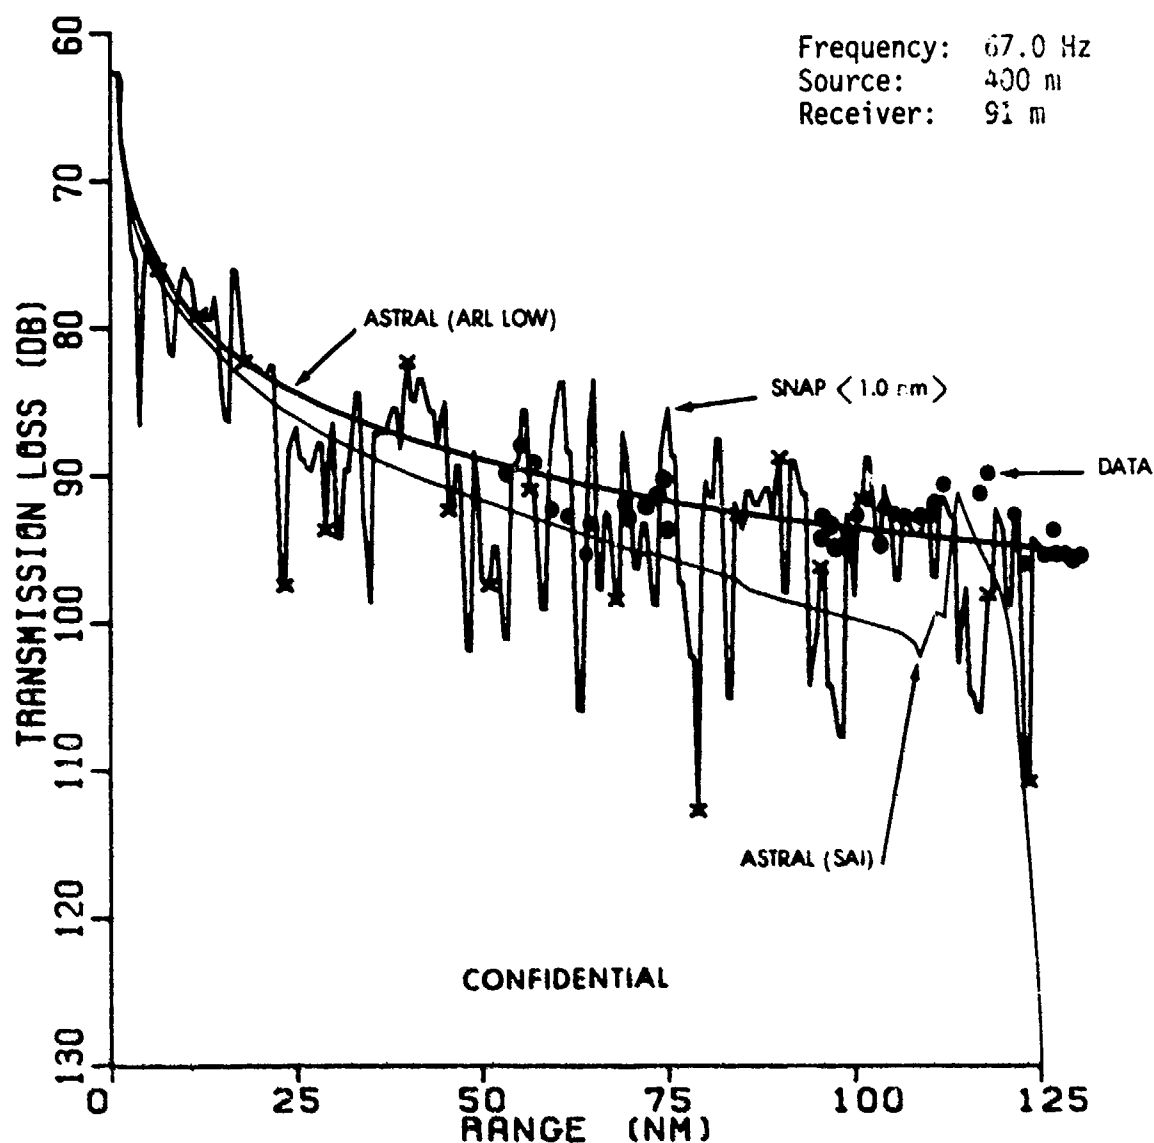

(U) Figure 15. Comparison of transmission loss estimates using ARL LMF region low attenuation bottom in 1-D SNAP and ASTRAL model runs; SAI types C, D, and E bottom in archival 2-D ASTRAL model runs; and CHURCH STROKE III measurements

CONFIDENTIAL


CONFIDENTIAL

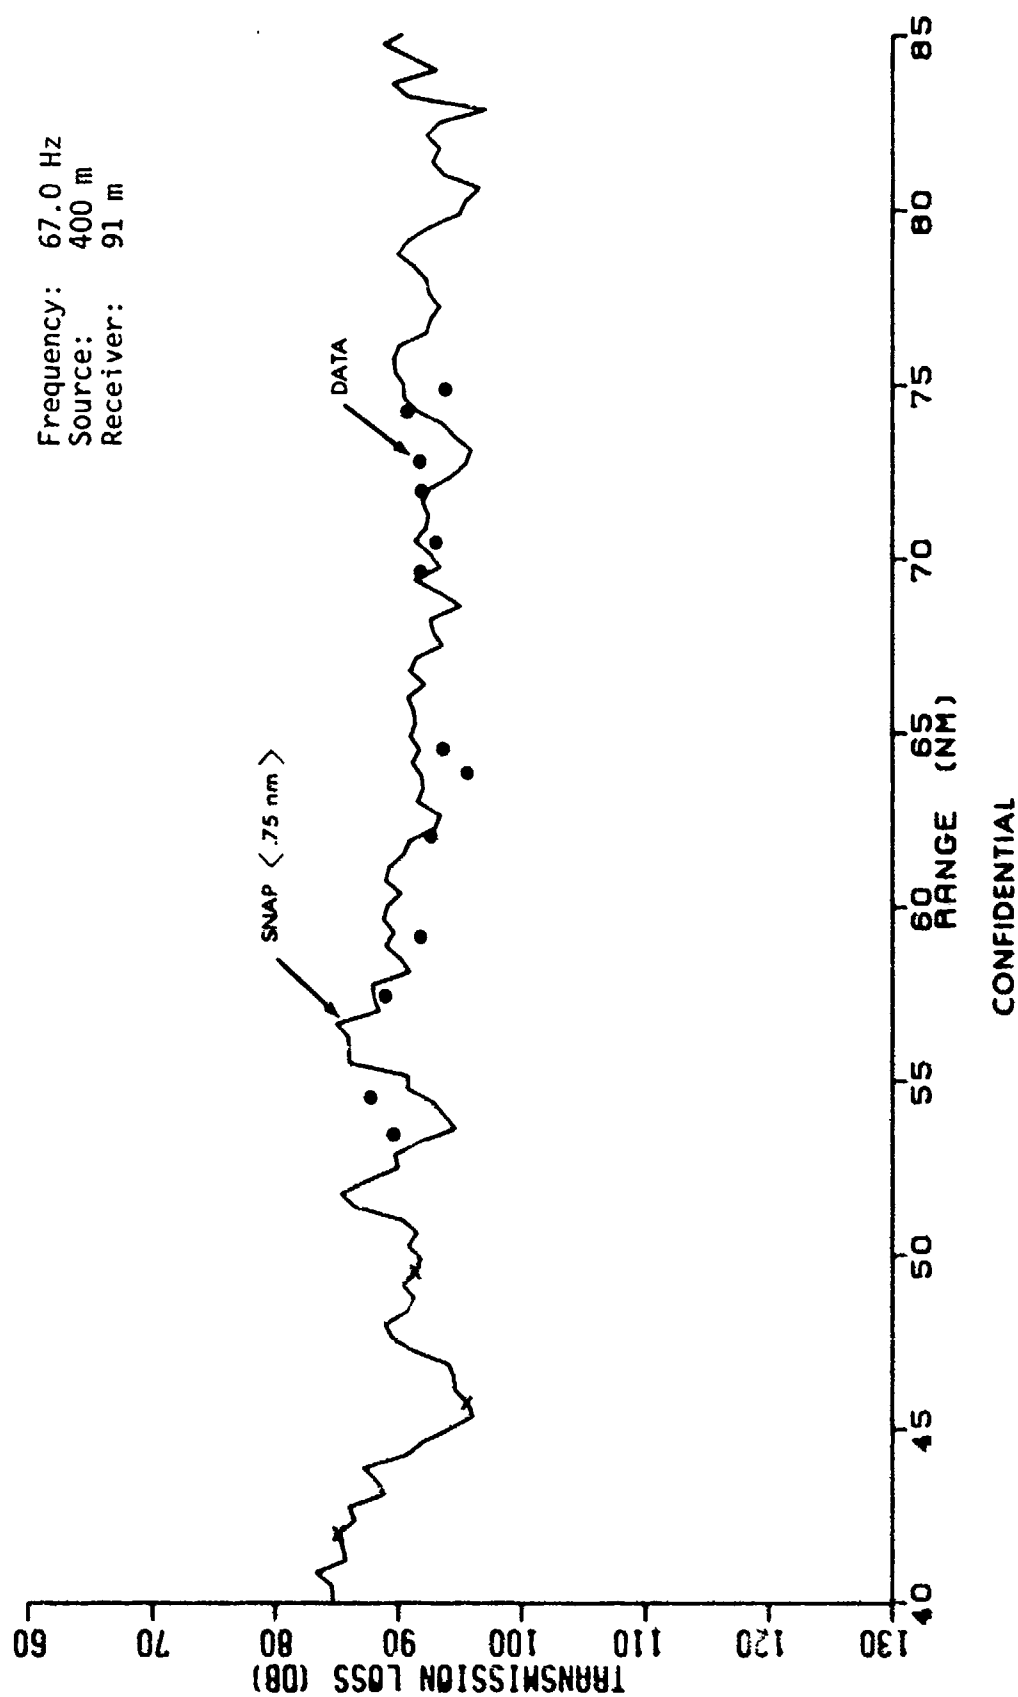

(U) Figure 16. Comparison of SNAP 2-D transmission loss estimates using measured sound speed and bathymetry, and ARL LMF region low attenuation bottom; and CHURCH STROKE III measurements, 40-85 nm

CONFIDENTIAL


CONFIDENTIAL

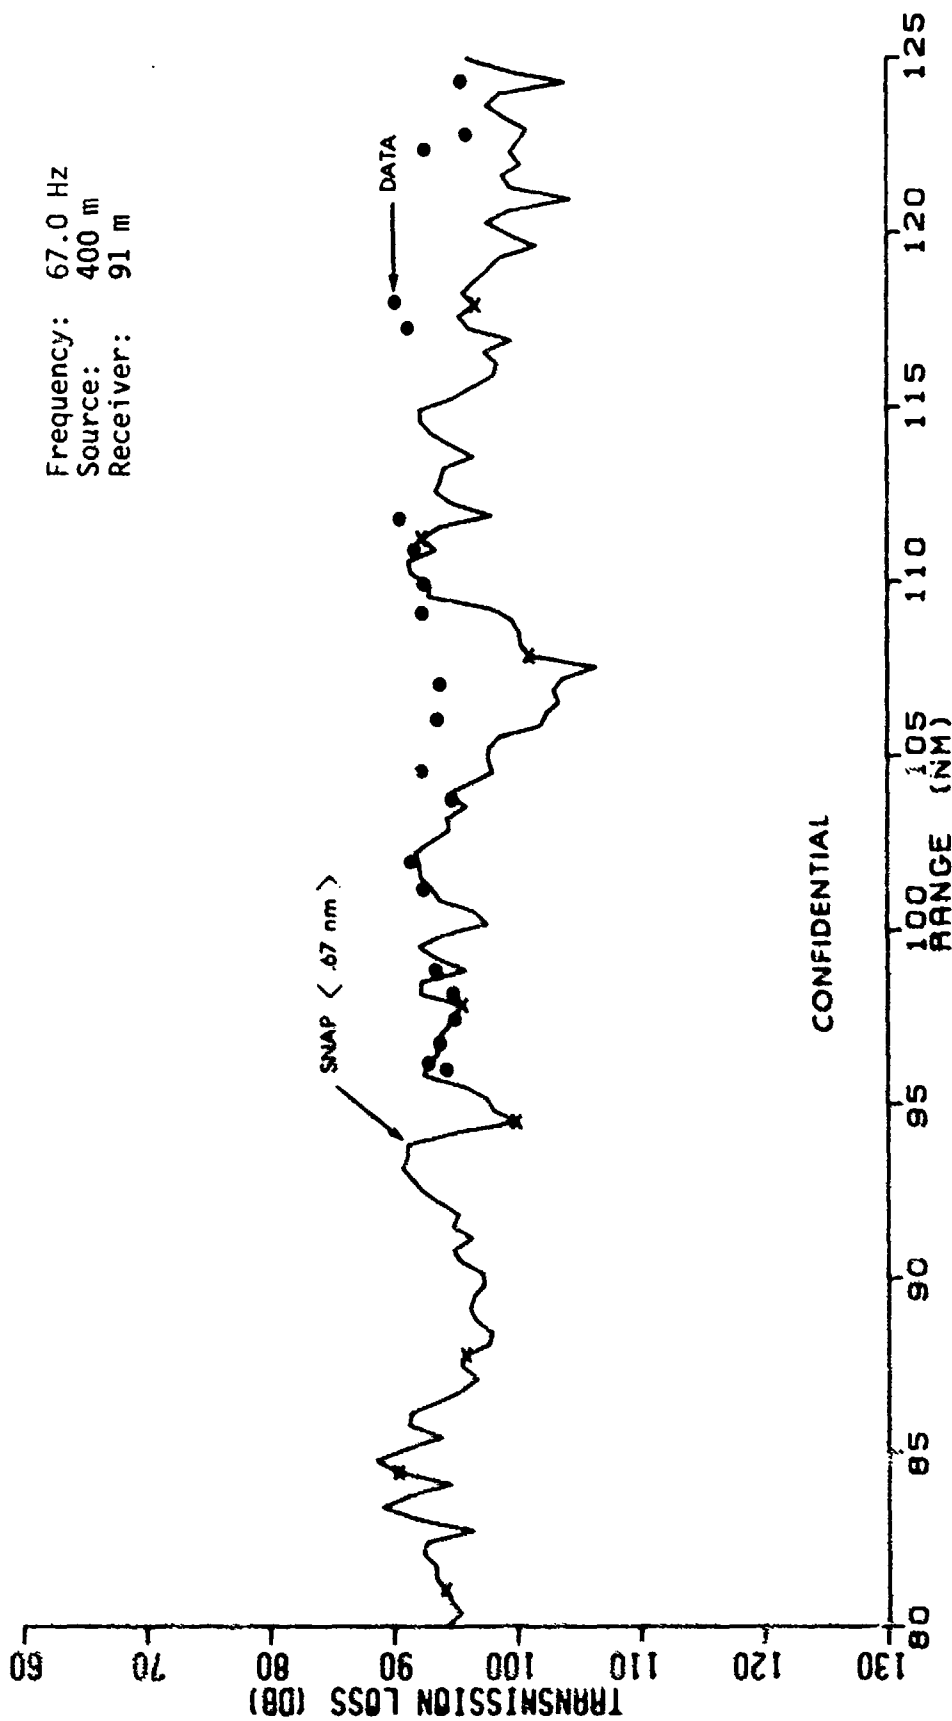

(U) Figure 17. Comparison of SNAP 2-D transmission loss estimates using measured sound speed and bathymetry, and ARL LMF region low attenuation bottom; and CHURCH STROKE III measurements, 80-125 nm

CONFIDENTIAL

CONFIDENTIAL

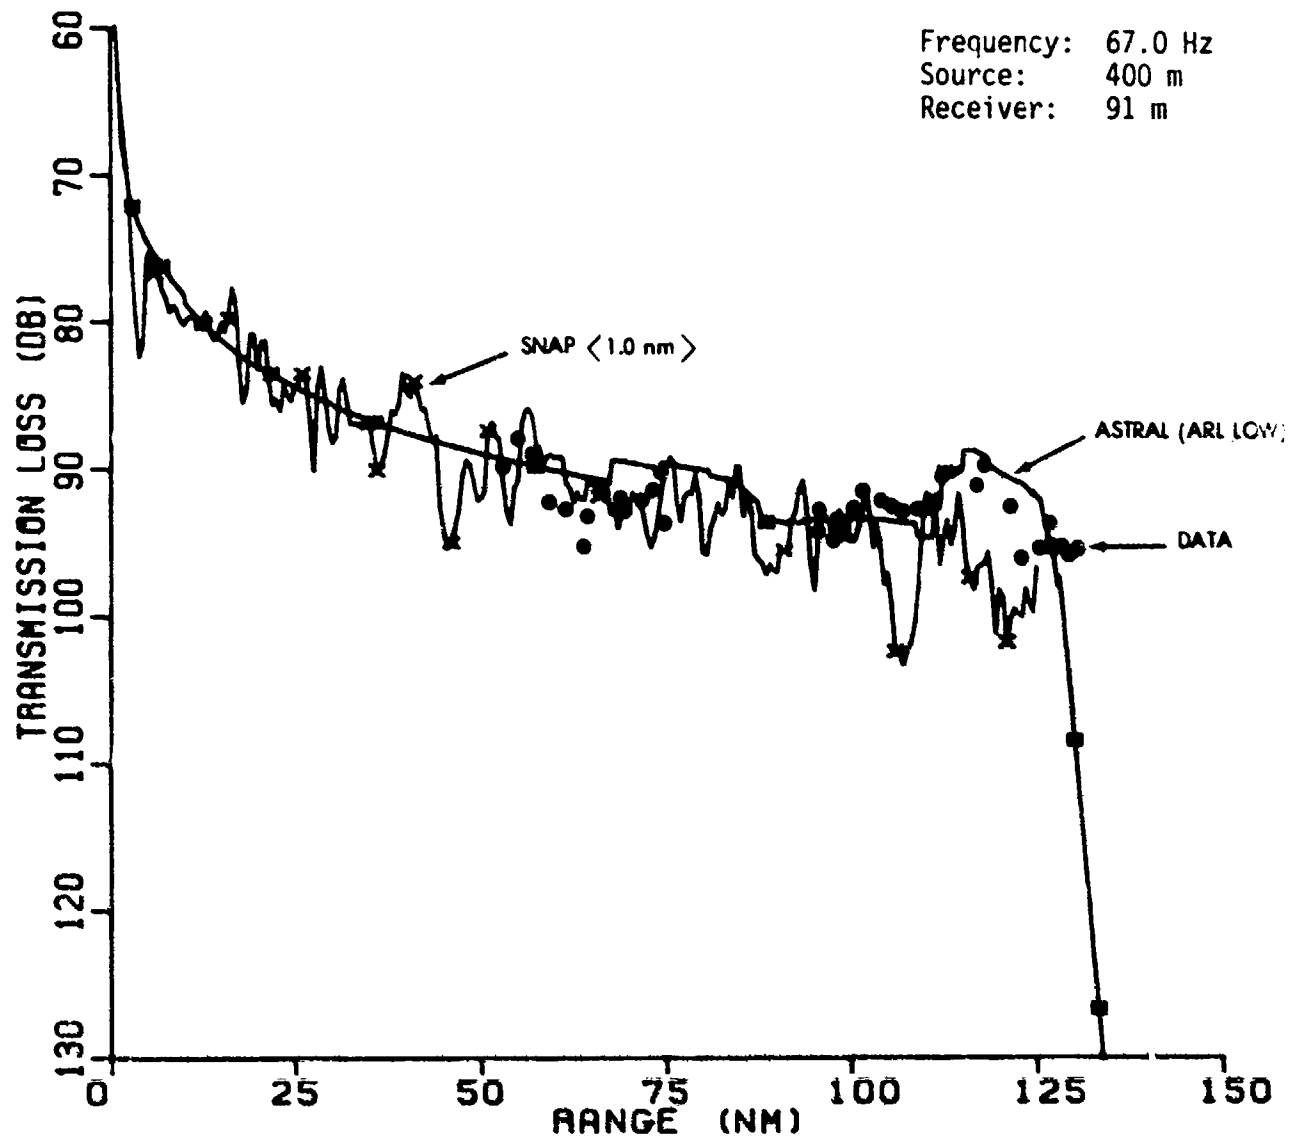

CONFIDENTIAL

(U) Figure 18. Comparison of transmission loss estimates using ARL LMF region low attenuation bottom, measured sound speed and bathymetry in 2-D SNAP and ASTRAL model runs; and CHURCH STROKE III measurements

CONFIDENTIAL

CONFIDENTIAL

history. The use of this geoacoustic model and its bottom-loss derivative in TL model estimates led to good agreement between the observed levels and the model estimates. There was some indication of agreement with regard to the more detailed structures of the observations and model estimates for track segments in the basin, but additional investigations must be pursued to resolve certain significant structure differences observed for other track segments, including portions over the slope and shelf. ASTRAL was shown to reproduce the average TL, the onset of slope enhancement, and the degree of slope enhancement fairly well, but disagreement remains between ASTRAL estimates and observations at the extreme range of the source track. The observations indicate sustained propagation beyond 127 nm, while ASTRAL indicates a rapidly increasing TL beyond this range, a result consistent with a PE model result for the same environment. However, low signal-to-noise ratios in the TL data at this extreme range cause the validity of these data to be suspect.

VII. RECOMMENDATIONS (U)

(C) While there is now a degree of confidence in the bottom-loss description for the basin regions, some questions still remain as to the reflectivity of the slope and shelf regions. Additional investigations of bottom properties in these areas might shed some light on the validity of the SAI bottom descriptions. A model study to assess the sensitivity of TL to slope and shelf reflectivity should be conducted. Once confidence is gained in the ability to properly estimate TL for this region, investigations should proceed to resolve differences between predicted and observed ambient noise levels and directionality. This will entail examination of the actual versus archival ship counts and some investigation of the validity of assumptions made during the aerial shipping surveys. The conditions and assumptions under which the ambient noise directionality was determined should be examined with respect to the probability that similar conditions can be simulated during ambient noise model calculations. In particular, the averaging intervals, the array configuration, the degree of array tilt, and the noise deconvolution method should be examined. Once confidence is gained in the quality of model input data and experimental observations, appropriate ambient noise model runs should then proceed. The result of these model runs should then be compared with experimental observations with an interest in identifying remaining discrepancies and, if possible, pointing out remaining data and model deficiencies.

(U) The final result of any further post-analysis should be an identification of key data base and model deficiencies and a set of recommendations for collecting the appropriate data or upgrading and modifying the current modeling capability.

CONFIDENTIAL

VIII. REFERENCES (U)

Mitchell, S. L., F. C. Focke, J. J. Lemmon, and M. M. McSwain (1978). Analysis of Acoustic Bottom Interaction in BEARING STAKE. Applied Research Laboratories Technical Report 78-52 (ARL TR-78-52): Applied Research Laboratories, The University of Texas at Austin.

Nowlin, W. D., Jr., and J. M. Hubertz (1972). Contrasting Summer Circulation Patterns for the Eastern Gulf. In: Contributions on the Physical Oceanography of the Gulf of Mexico, L.R.A. Capurro and Joseph L. Reid, eds. Houston, Gulf Publishing Co., p. 110-139 (Texas A&M University Oceanographic Studies Series, v. 2).

Tracor, Inc. (1979). Quick Look Report for CHURCH STROKE III, Cruise 1 (U). Tracor Sciences and Systems, Tracor, Inc., Rockville, MD, September, 73 p. (Tracor Document Number T-79-RV-72S, September 13, 1979). SECRET.

Underwater Systems, Inc. (1979). Gulf of Mexico and Caribbean Sea Data and Model Base Report (U). Underwater Systems, Inc., Rockville, MD, July, 220 p. (LRAPP Report C79-027, July 1979). CONFIDENTIAL.

CONFIDENTIAL

DISTRIBUTION LIST (U)

Assistant Secretary of the Navy (Research, Eng. and Systems) Department of the Navy Washington, DC 20350 Attn: G. A. Cann	1	Commander Naval Air Systems Command Naval Air Systems Command Hdqrs Washington, DC 20361 Attn: NAIR-370	1
Chief of Naval Operations Department of the Navy Washington, DC 20350 Attn: OP-095	1	Deputy Under Sec or Defense for Research and Engineering Department of Defense Washington, DC 20301	1
OP-096	1		
OP-951	1	Defense Adv Research Proj Agency 1400 Wilson Boulevard Arlington, VA 22209	1
OP-952	1	Attn: Dr. T. Kooij Cdr. V. E. Simmons	1
Headquarters Naval Material Command Washington, DC 20360 Attn: Code MAT-08T245	2	Commander Naval Oceanography Command NSTL Station, MS 39529	1
Project Manager Antisubmarine Warfare System Proj Department of the Navy Washington, DC 20360 Attn: PM-4	2	Director of Navy Laboratories Rm 1062, Crystal Plaza Bldg. 5 Department of the Navy Washington, DC 20360	1
Chief of Naval Research 800 North Quincy Street Arlington, VA 22217 Attn: Code 100	1	Commander in Chief U.S. Atlantic Fleet Norfolk, VA 23511 Attn: Code 358	1
Code 102B	1		
Code 220	1		
Code 230	1	Commander Second Fleet FPO New York, NY 09501	1
Code 460	1		
Code 480	1		
Commander Naval Electronic Systems Command Naval Electronic Sys Command Hdqrs Washington, DC 20360 Attn: PME-124	1	Commander Operational Test and Eval. Force Naval Base Norfolk, VA 23511 Attn: Code 42	1
PME-124TA	1		
PME-124/40	1	Oceanographic Development Sqd 8 Naval Air Station Patuxent River, MD 20670	1
PME-124/60	1		
Elex-320	1		
Commander Naval Sea Systems Command Naval Sea Systems Command Hdqrs Washington, DC 20362 Attn: NSEA-06H1	1	ARPA Research Center Unit 1, Bldg. 301A NAS Moffett Field, CA 94035 Attn: E. L. Smith	1
		Defense Documentation Center Cameron Station Alexandria, VA 22314	3

CONFIDENTIAL

Commanding Officer		Commanding Officer	
Naval Research Laboratory		Naval Coastal Systems Laboratory	
Washington, DC 20375		Panama City, FL 32407	1
Attn: Code 8100	1		
Code 8160	1	Officer-in-Charge	
Code 2627	1	White Oak Laboratory	
		Naval Surface Weapons Center	
Commander	1	Silver Spring, MD 20910	1
Naval Oceanographic Office			
NSTL Station, MS 39522		Officer-in-Charge	
Attn: Code 7000	1	Carderock Lab	
Code 7300	1	David W. Taylor Naval Ship R&D Center	
Library	1	Bethesda, MD 20084	
Commanding Officer		Superintendent	
Naval Ocean Research and		Naval Postgraduate School	
Development Activity		Monterey, CA 93940	
NSTL Station, MS 39529		Attn: Library	1
Attn: Code 110			
Code 125	3	Commanding Officer	
Code 300	1	Naval Environmental Prediction	
Code 320	1	Research Facility	
Code 340	1	Monterey, CA 93940	1
Code 500	1		
Code 520 File	1	Chief, Def. Res. Est. Atlantic	
Code 522	1	P. O. Box 1012	
		Dartmouth, Nova Scotia B2Y3Z7	1
Naval Ocean Research and			
Development Activity		Director of Naval Matters	
Liaison Office		Center of Naval Analysis	
800 N. Quincy St.		Arlington, VA 22209	
Arlington, VA 22217		Attn: C. E. Woods	1
Attn: Code 130	1		
		University of California	
Officer-in-Charge	1	Marine Physical Lab San Diego	
New London Laboratory		P. O. Box 6049	
Naval Underwater Systems Center		San Diego, CA 92106	1
New London, CT 06320			
Attn: Code 31	1	Johns Hopkins University	
Code 312	1	Applied Physics Laboratory	
Code 542	1	Johns Hopkins Road	
		Laurel, MD 20810	
Commander	1	Attn: A. Chwastyk	1
Naval Ocean Systems Center		W. L. May	1
San Diego, CA 92152		G. A. Smith	1
Attn: Code 724	2		
Code 7443	1	Palisades Geophysical Inst., Inc.	
		131 Erie St.	
Commander		P. O. Box 396	
Naval Air Development Center		Blauvelt, NY 10913	1
Warminster, PA 18974			
Attn: Code 303	1	University of Texas	
Code 3032	1	Applied Research Laboratories	
		P. O. Box 8029	
		Austin, TX 78712	
		Attn: G. E. Ellis	1
		L. D. Hampton	1
		K. E. Hawker	1

CONFIDENTIAL

Woods Hole Oceanographic Inst.
Woods Hole, MA 02543
Attn: E. E. Hays

2

Analysis and Technology, Inc.
Route 2
North Stonington, CT 06359
Attn: S. Elam

1

B-K Dynamics
15825 Shady Grove Road
Rockville, MD 20850
Attn: P. G. Bernard

1

Bell Telephone Laboratories
1 Whippany Road
Whippany, NJ 07981
Attn: Dr. J. Goldman
Dr. L. F. Fretwell

1

1

Bolt, Beranek and Newman
50 Moulton St.
Cambridge, MA 02138

1

Daniel H. Wagner Associates
Station Square One
Paoli, PA 19301

1

Daubin Systems Corp.
104 Crandon Blvd., Suite 315
Key Biscayne, FL 33149
Attn: Dr. S. C. Daubin

1

Envo, Inc.
800 Follin Lane
Vienna, VA 22180
Attn: G. A. Phillips

Ocean Data Systems, Inc.
6000 Executive Blvd.
Rockville, MD 20852
Attn: G. V. Jacobs
Dr. E. Morenoff
J. H. Locklin

1

1

1

Ocean Data Systems, Inc.
3581 Kenyon St.
San Diego, CA 92110

1

Planning Systems, Inc.
7900 Westpark Dr., Suite 600
McLean, VA 22101
Attn: R. Klinkner
Dr. R. S. Cavanaugh

1

1

Science Applications, Inc.
8400 Westpark Drive
McLean, VA 22101
Attn: Dr. J. S. Hanna

Sutron Corp.
1925 N. Lynn St., Suite 700
Arlington, VA 22209
Attn: C. H. Dabney

1

Tracor, Inc.
1601 Research Blvd.
Rockville, MD 20850
Attn: J. T. Gottwald
Dr. A. F. Wittenborn

1

1

TRW Systems Group
7600 Colshire Dr.
McLean, VA 22101
Attn: R. T. Brown
I. B. Gereben

1

1

Underwater Systems, Inc.
8121 Georgia Ave.
Silver Spring, MD 20910
Attn: Dr. M. S. Weinstein

1

Western Electric Company
P. O. Box 20046
Greensborough, NC 27420
Attn: R. H. Harris
H. Skeen

1

1

CONFIDENTIAL

(This Page Intentionally Left Blank)

CONFIDENTIAL

UNCLASSIFIED

SECURITY CLASSIFICATION OF THIS PAGE (When Data Entered)

REPORT DOCUMENTATION PAGE		READ INSTRUCTIONS BEFORE COMPLETING FORM
1. REPORT NUMBER NORDA Technical Note 63	2. GOVT ACCESSION NO.	3. RECIPIENT'S CATALOG NUMBER
4. TITLE (and Subtitle) Environmental Effects on Low Frequency Transmission Loss in the Gulf of Mexico (U)		5. TYPE OF REPORT & PERIOD COVERED Final 1 Oct 79 - 30 Sep 80
		6. PERFORMING ORG. REPORT NUMBER
7. AUTHOR(s) Burlie A. Brunson M. Mark Truxillo Richard B. Evans		8. CONTRACT OR GRANT NUMBER(s)
9. PERFORMING ORGANIZATION NAME AND ADDRESS Naval Ocean Research and Development Activity Ocean Science and Technology Laboratories/Code 321 NSTL Station, Mississippi 39529		10. PROGRAM ELEMENT, PROJECT, TASK AREA & WORK UNIT NUMBERS Prog. Element 63795N Work Unit 73210A-00
11. CONTROLLING OFFICE NAME AND ADDRESS Surveillance Environmental Acoustic Support Project, NORDA Code 522 NSTL Station, Mississippi 39529		12. REPORT DATE September 1980
		13. NUMBER OF PAGES
14. MONITORING AGENCY NAME & ADDRESS (if different from Controlling Office)		15. SECURITY CLASS. (of this report) CONFIDENTIAL
		15a. DECLASSIFICATION/DOWNGRADING SCHEDULE Classified by OPNAVINST S5513S, Encl. 42, 07 Feb 1977. Review on 07 Feb 1997.
16. DISTRIBUTION STATEMENT (of this Report) Distribution limited to U. S. Government Agencies only. Further requests for this document must be made to NORDA Code 321, NSTL Station, MS 39529.		
17. DISTRIBUTION STATEMENT (of the abstract entered in Block 20, if different from Report)		
18. SUPPLEMENTARY NOTES		
19. KEY WORDS (Continue on reverse side if necessary and identify by block number) Ocean Acoustics Geoacoustic Models Transmission Loss Low Frequency Acoustic Models Model Sensitivity Environmental Effects		
20. ABSTRACT (Continue on reverse side if necessary and identify by block number) (U) Acoustic transmission loss data were acquired during Cruise 1 of the CHURCH STROKE III Exercise of July 1979. Initial comparisons of observed transmission loss data, with pre-exercise model predictions made using the ASTRAL model with historical environmental data inputs indicated a consider- able degree of disagreement. A series of post-exercise model runs were undertaken to isolate the environmental factors contributing to the observed disagreement. Model runs using a range-dependent normal mode model (SNAP)		

DD FORM 1473
1 JAN 73EDITION OF 1 NOV 65 IS OBSOLETE
S/N 0102-LF-014-6601

UNCLASSIFIED

SECURITY CLASSIFICATION OF THIS PAGE (When Data Entered)

~~CONFIDENTIAL~~

UNCLASSIFIED (This page is unclassified)

SECURITY CLASSIFICATION OF THIS PAGE (When Data Entered)

were made using a geoacoustic description of the seafloor. Good agreement was attained for detailed structure comparisons. Estimates made using the model ASTRAL, together with a bottom loss description derived from the same geoacoustic description of the seafloor, matched the observed levels quite well in an average sense. Since the attenuation estimates were derived from those resulting from the BEARING STAKE Exercise, some implications as to the validity of geoacoustic parameter extrapolation are apparent. Additional implications arise with respect to the degree to which pre-exercise ambient noise estimates agree with observations made during CHURCH STROKE III.

(This page is unclassified)

UNCLASSIFIED

SECURITY CLASSIFICATION OF THIS PAGE (When Data Entered)



DEPARTMENT OF THE NAVY

OFFICE OF NAVAL RESEARCH
875 NORTH RANDOLPH STREET
SUITE 1425
ARLINGTON VA 22203-1995

IN REPLY REFER TO:

5510/1
Ser 321OA/011/06
31 Jan 06

MEMORANDUM FOR DISTRIBUTION LIST

Subj: DECLASSIFICATION OF LONG RANGE ACOUSTIC PROPAGATION PROJECT (LRAPP) DOCUMENTS

Ref: (a) SECNAVINST 5510.36

Encl: (1) List of DECLASSIFIED LRAPP Documents

1. In accordance with reference (a), a declassification review has been conducted on a number of classified LRAPP documents.
2. The LRAPP documents listed in enclosure (1) have been downgraded to UNCLASSIFIED and have been approved for public release. These documents should be remarked as follows:

Classification changed to UNCLASSIFIED by authority of the Chief of Naval Operations (N772) letter N772A/6U875630, 20 January 2006.

DISTRIBUTION STATEMENT A: Approved for Public Release; Distribution is unlimited.

3. Questions may be directed to the undersigned on (703) 696-4619, DSN 426-4619.

A handwritten signature in black ink, appearing to read "B. F. Link", is positioned above the typed name.

BRIAN LINK
By direction

Subj: DECLASSIFICATION OF LONG RANGE ACOUSTIC PROPAGATION PROJECT
(LRAPP) DOCUMENTS

DISTRIBUTION LIST:

NAVOCEANO (Code N121LC – Jaime Ratliff)
NRL Washington (Code 5596.3 – Mary Templeman)
PEO LMW Det San Diego (PMS 181)
DTIC-OCQ (Larry Downing)
ARL, U of Texas
Blue Sea Corporation (Dr. Roy Gaul)
ONR 32B (CAPT Paul Stewart)
ONR 321OA (Dr. Ellen Livingston)
APL, U of Washington
APL, Johns Hopkins University
ARL, Penn State University
MPL of Scripps Institution of Oceanography
WHOI
NAVSEA
NAVAIR
NUWC
SAIC

Declassified LRAPP Documents

Report Number	Personal Author	Title	Publication Source (Originator)	Pub. Date	Current Availability	Class.
ARL TR7952	Focke, K. C., et al.	CHURCH STROKE 2 CRUISE 5 PAR/ACODAC ENVIRONMENTAL ACOUSTIC MEASUREMENTS AND ANALYSIS (U)	University of Texas, Applied Research Laboratories	791029	ADC025102; NS; AU; ND	C
Unavailable	Van Wyckhouse, R. J.	SYNBAPS. VOLUME I. DATA BASE SOURCES AND DATA PREPARATION	Naval Ocean R&D Activity	791201	ADC025193	C
NORDATN63	Brunson, B. A., et al.	ENVIRONMENTAL EFFECTS ON LOW FREQUENCY TRANSMISSION LOSS IN THE GULF OF MEXICO (U)	Naval Ocean R&D Activity	800901	ADC029543; ND	C
NORDATN80C	Gereben, I. B.	ACOUSTIC SIGNAL CHARACTERISTICS MEASURED WITH THE LAMBDA III DURING CHURCH STROKE III (U)	Naval Ocean R&D Activity	800915	ADC023527; NS; AU; ND	C
NOSCTR664	Gordon, D. F.	ARRAY SIMULATION AT THE BEARING STAKE SITES	Naval Ocean Systems Center	810401	ADC025992; NS; AU; ND	C
NOSCTR703	Gordon, D. F.	NORMAL MODE ANALYSIS OF PROPAGATION LOSS AT THE BEARING STAKE SITES (U)	Naval Ocean Systems Center	810801	ADC026872; NS; AU; ND	C
NOSCTR680	Neubert, J. A.	COHERENCE VARIABILITY OF ARRAYS DURING BEARING STAKE (U)	Naval Ocean Systems Center	810801	ADC028075; NS; ND	C
HSECO735	Luehrmann, W. H.	SQUARE DEAL R/V SEISMIC EXPLORER FIELD OPERATIONS REPORT (U)	Seismic Engineering Co.	731121	AD0530744; NS; ND	C; U
MPL-C-42/76	Morris, G. B.	CHURCH ANCHOR EXPLOSIVE SOURCE (SUS) PROPAGATION MEASUREMENTS FROM R/P FLIP (U)	Marine Physical Laboratory	760701	ADC010072; AU; ND	C; U
ARL TR7637	Mitchell, S. K., et al.	SQUARE DEAL EXPLOSIVE SOURCE (SUS) PROPAGATION MEASUREMENTS. (U)	University of Texas, Applied Research Laboratories	760719	ADC014196; NS; AU; ND	C; U
NORDAR23	Fenner, D. F.	SOUND SPEED STRUCTURE OF THE NORTHEAST ATLANTIC OCEAN IN SUMMER 1973 DURING THE SOUND VELOCITY CONDITIONS DURING THE CHURCH ANCHOR EXERCISE (U)	Naval Ocean R&D Activity	800301	ADC029546; NS; ND	C; U
NOOTR230	Bucca, P. J.	PARKA II EXPERIMENT UTILIZING SEA SPIDER, ONR SCIENTIFIC PLAN 2-69 (U)	Naval Oceanographic Office	751201	NS; AU; ND	C; U
ONR SP 2-69; MC PLAN-01	Unavailable	PARKA I EXPERIMENT	Maury Center for Ocean Science	690626	ADB020846; ND	U
Unavailable	Unavailable	SEA SPIDER TRANSDUCER	Maury Center for Ocean Science	691101	AD0506209	U
USRD CR 3105	Unavailable	ATLANTIC TEST BED MEASUREMENT PROGRAM (U)	Naval Research Laboratory	700505	ND	U
MC PLAN 05; ONR Scientific Plan 1-71	Unavailable	PROJECT NEAT- A COLLABORATIVE LONG RANGE PROPAGATION EXPERIMENT IN THE NORTHEAST ATLANTIC, PART I (U)	Maury Center for Ocean Science	701020	ND	U
ACR-170 VOL.1	Hurdle, B. G.	THE PARKA I EXPERIMENT. APPENDICES- PACIFIC ACOUSTIC RESEARCH KANOEHE-ALASKA (U)	Naval Research Laboratory	701118	ND	U
MC-003-VOL-2	Unavailable		Maury Center for Ocean Science	710101	ND	U